

XM Series

XM2600/S/ST | XM3100/S/ST

WIA Machine Tools Multi-tasking Machine

WIA MACHINE TOOLS



Technical Leader ▶

Multitasking Machine **XM Series**, designed by WIA machine tools with years of expertise and the latest technology, is designed to maximize productivity by utilizing mill head and lower turret.

ITEM	XM2600	XM2600S	XM2600ST	XM3100	XM3100S	XM3100ST
10" 1st Spindle	●	●	●	-	-	-
12" 1st Spindle	-	-	-	●	●	●
10" 2nd Spindle	-	●	●	-	●	●
B-axis Mill Head	●	●	●	●	●	●
NC Servo Tail Stock	●	-	-	●	-	-
Std. Turret	-	-	●	-	-	●
Mill Turret	-	-	○	-	-	○

● : Standard ○ : Option

XM Series

9-axis Multi-tasking Machine

- The adoption of a milling head with a built-in motor B axis (0.0001°) enables the operator to perform turning and milling works in perfect harmony
- Expanded machining area by shortening the length of the mill head
- Y-axis travel distance increased : 250 mm (9.8") -> 300 mm (11.8")
- Application of CAPTO C6 tool for high speed complex machining
- The model features built-in 1st & 2nd-spindles with high power and high torque





Applications & Parts

VACUUM PUMP
ROTOR



IMPELLER



MOUNTING
SHELL



ARTIFICIAL
BONE



HOUSING,
ELECTRIC MOTOR



BLADE,
COMPRESSOR



HOUSING,
ENGINE




CRANKSHAFT



01 BASIC STRUCTURE

Multitasking machine for high productivity

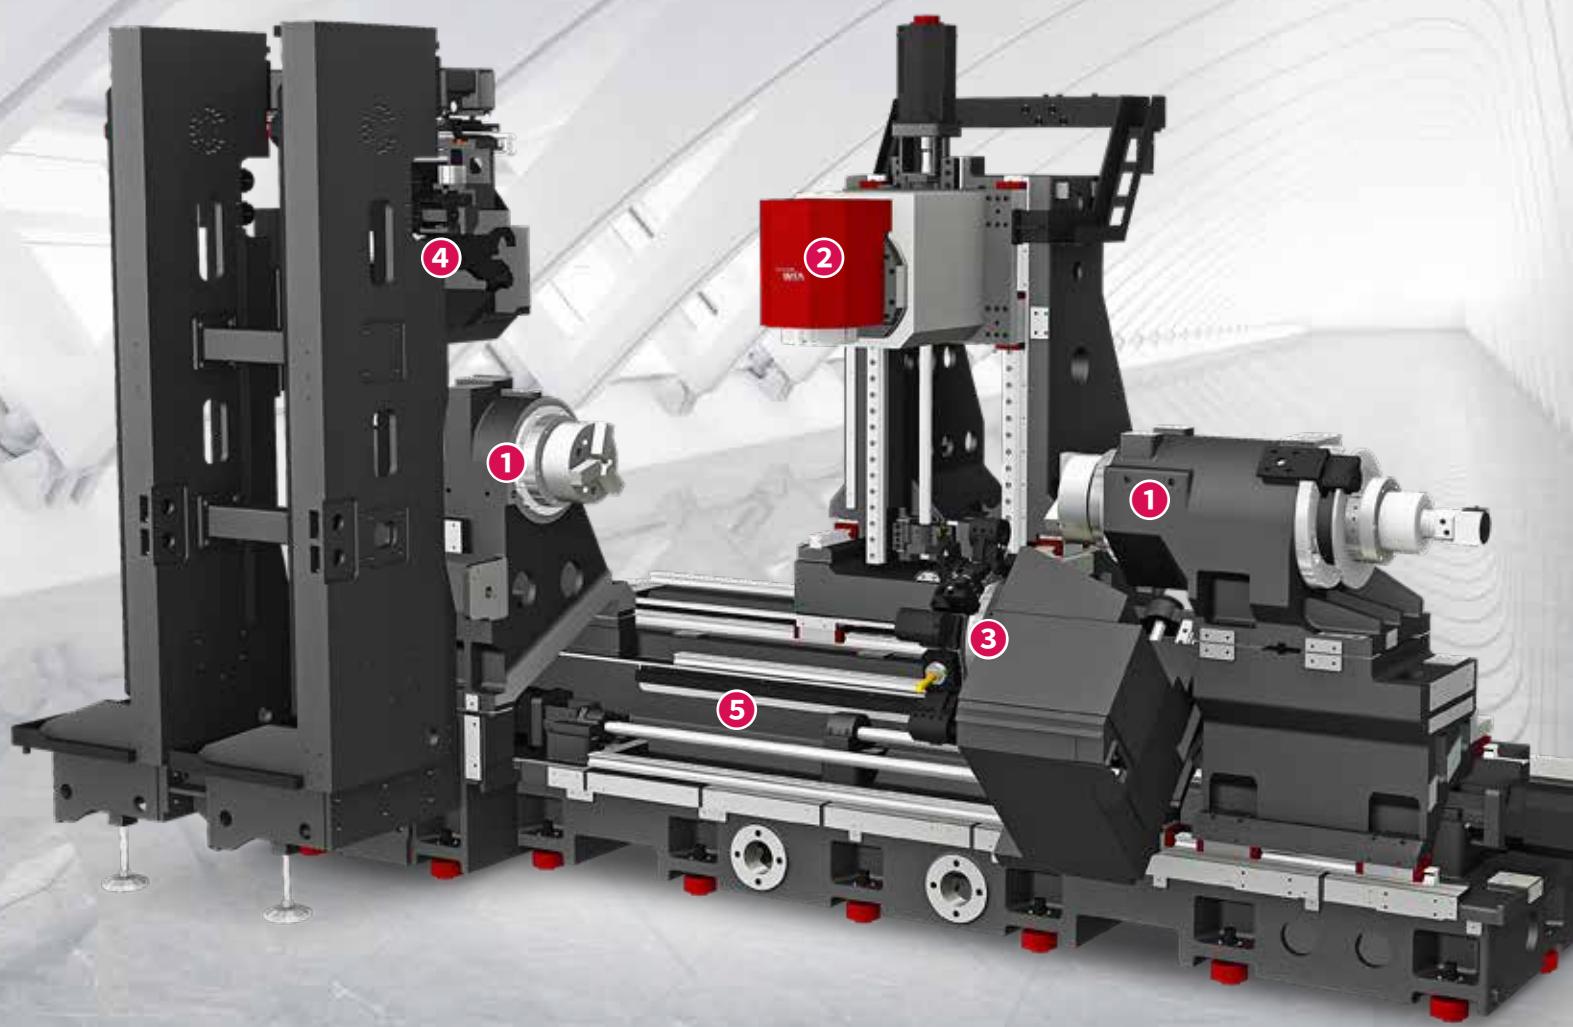

※ This model is ST type

6/7/9-AXIS MULTI-TASKING MACHINE



① Built-in Spindle (1st/2nd)

XM Series 1st/2nd built-in spindle minimizes vibration to allow machining of the highest precision.

Chuck Size (1st/2nd) XM2600 : **10"/10"**, XM3100 : **12"/10"**



② Compact Mill Head

The B-axis control mill head is mounted with a high resolution encoder having a built-in motor and 0.0001° indexing ability to secure high positioning precision.

Driving Methode : **Built-in** Speed : **12,000 r/min**



③ Lower Turret (ST Type)

The lower turret ensures high-speed machining of complicated shapes in precision only with one-time setting of workpiece machined with the mill head.


Std. : **Turning Turret** Opt : **BMT65 Mill Turret (5,000rpm)**



④ ATC & Magazine

The installation of magazine on the front provides efficient tool change and tool setting. Magazine with chain driving method provides 40 tools as standard, and 80 tools as option.

Tool Shank Type : **CAPTO C6** Tool Change Step : **4 Step**

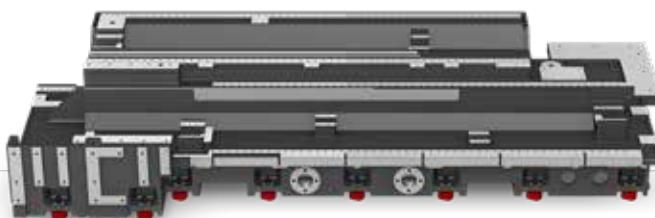


BED

⑤ Secure Bed Structure

It enables high-speed/high-precision machining by significantly lowering the center of gravity of the bed, and stably arranging key units including the main spindle and columns on the bed. In particular, the cover is designed so that chips and cutting oil are not directly transferred to the bed, reducing precision errors due to temperature changes.

02 HIGH-SPEED TRAVEL

High-speed, high-productivity multi-tasking machine

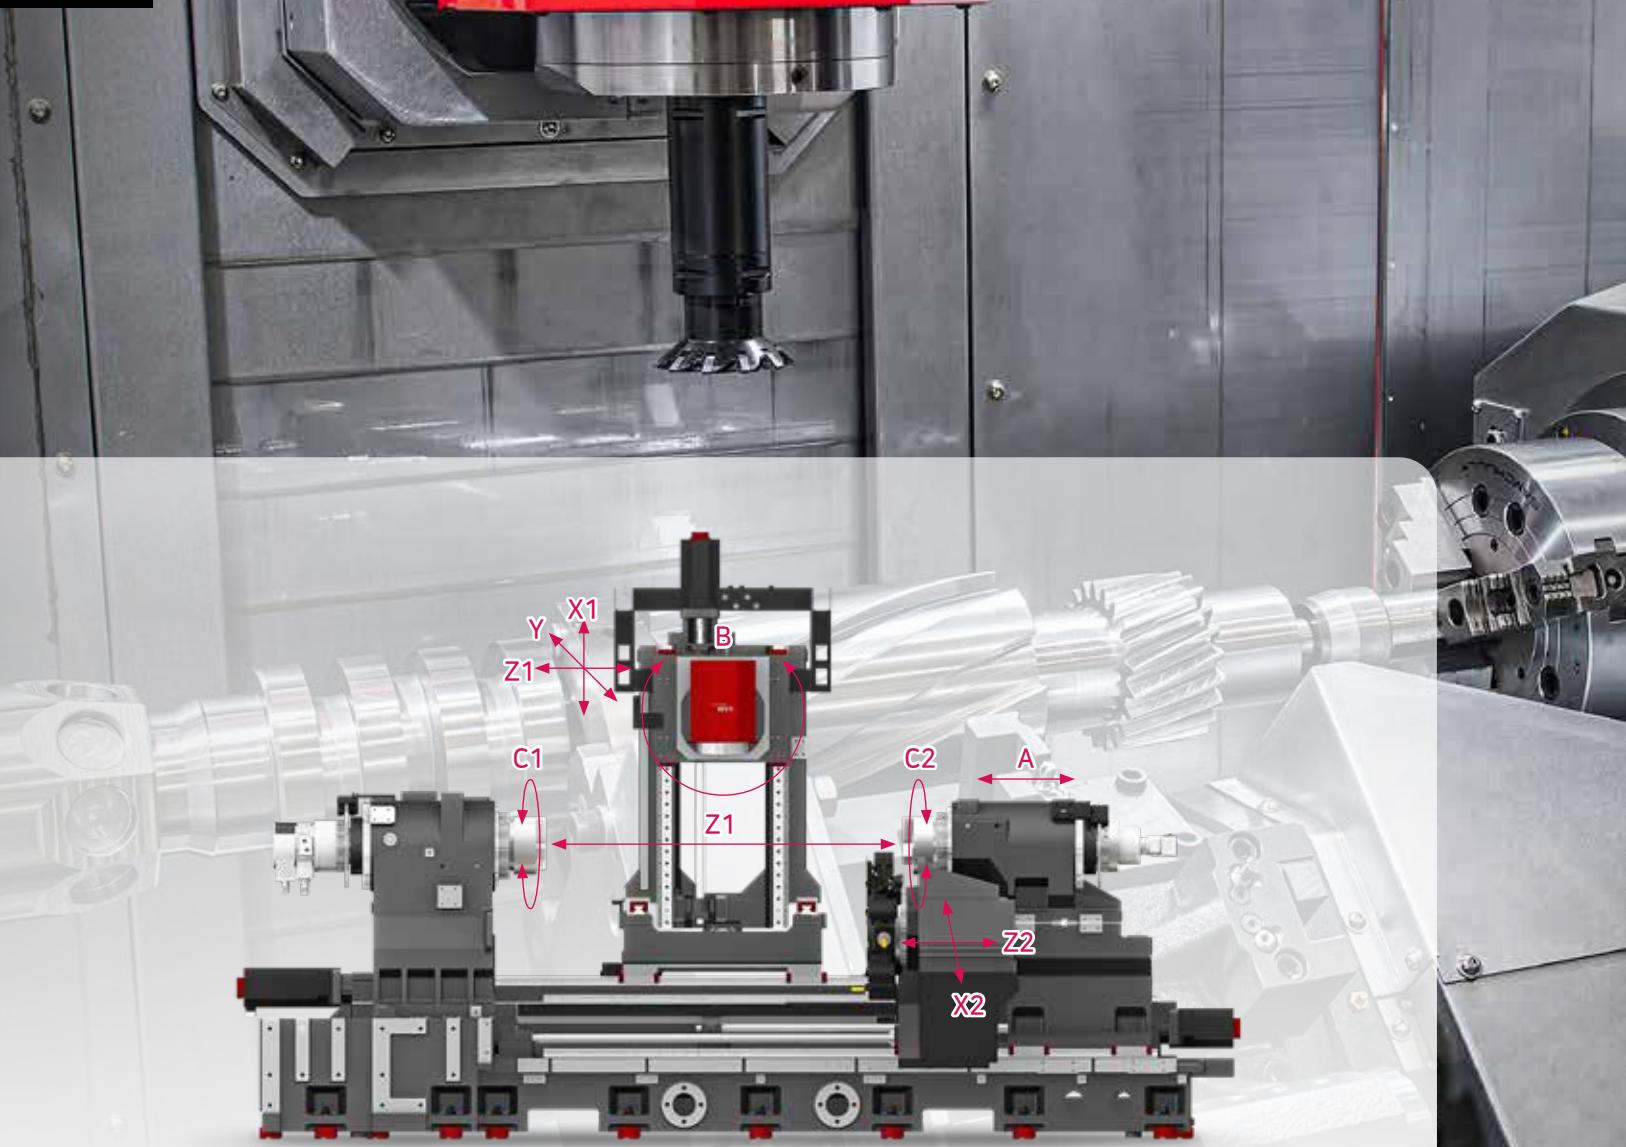

※ This model is ST type

Travel (X1/Z1/Y/X2/Z2/A)

(27.4"/11.8"/62.4"/9.3"/60.6"/62.8" <ST: 60.6">)

695/1,585/300/235/1,540/1,595 <ST: 1,540> mm

Rapid Traverse Rate (X1/Z1/Y/X2/Z2/A)

B-axis

48/36/48/24/36/30 m/min

240° (±120°)

HIGH SPEED & HIGH PRECISION

Y-AXIS

Cross Type Y-axis



The cross type Y-axis ensures excellent positioning accuracy and provides easier programming and correction of programs which helps in enhancing productivity.

Wide Machining Range of Y-axis

The adoption of Y-axis with wide cutting range of 300mm(11.8") allows Y-axis cutting in a single step without having to rotate the C-axis, and improves the cutting pitch and precision level.

Previous Model	250 mm (9.8")
XM Series	300 mm (11.8")

50 mm Increase

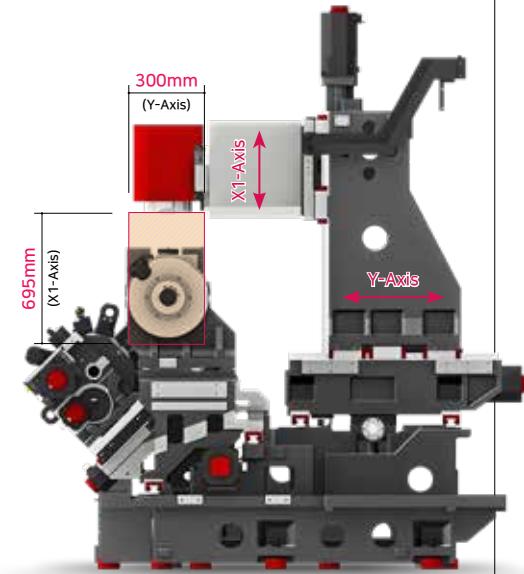

GUIDE WAY

High-Speed Roller LM Guideway

Linear roller guideways are applied to reduce non-cutting time and bring high rigidity.



Ball Screw Nut Cooling (Z1/Y/X1 axis : Std.)

The Z1, Y, and X1 axis, which have a higher transfer frequency than other axis, use the ball screw nut cooling method as standard to minimize thermal displacement due to the frequent repetitive motion.

Linear Scale **OPTION**

Linear scales on all axis providing high precision positioning accuracy and compensates for ball screw thermal displacement ensuring extremely precise machining.

In addition, the absolute type linear scale is installed in close proximity to the ball screw of each axis.



03 COMPACT MILL HEAD


Milling heads for machining complex shapes



MACHINING PROCESS WITH ONLY ONE INITIAL SETTING

Millhead for multi-tasking

The XM Series is the culmination of WIA machine tools's technological prowess, capable of machining any product of complex shape required by a customer through its mill head and lower turret.

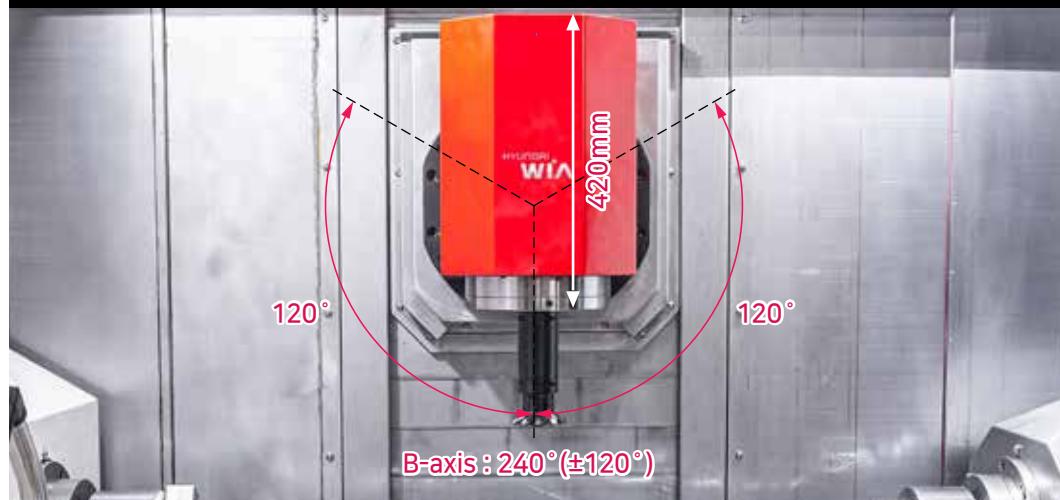

Expansion of machining range

The length of the mill head has been reduced by 130mm (5.1") compared to the previous model to expand the machining range.

Compact Mill Head with a B-axis Operated by a High-precision DDM

The mill head is a product of combining WIA machine tools's latest technologies. The B-axis operated by DD motor method (0.0001°) to eliminate rotational backlash and 1st spindle (0.0001°) together can machine impellers, blades and other simultaneous 5-axis machining (standard application).

Also, it can perfectly carry out machining of workpieces with complex shape including sloped surface, etc

Mill Head Specifications

Driving Method	Speed	B-axis Travel	Indexing Angle	Tool Shank
Built-in	12,000 rpm	240° (-120°~+120°)	0.0001°	CAPTO-C6

CAPTO-C6

CAPTO-C6, which allows double-sided circulation, is applied as a standard for maximum cutting capability.

- Ideal over load analysis
- Decreased tool change time by short taper / Excellent cutting ability



04 HIGH PRECISION SPINDLE

High-precision spindles that maintain precision even during prolonged machining



TWIN BUILT-IN SPINDLE FOR HIGH PRODUCTIVITY

SPINDLE

Built-in Spindle (1st/2nd)

The 1st and 2nd spindles with a built-in motor structure can minimize the vibration and heat generated during high-speed rotation, which makes them ideal for high-precision machining.

Also, Machines with a 2nd spindle can perform secondary operations with a single setup, increasing flexibility and productivity.



C-Axis Control - C-axis control of 1st and 2nd spindle allows machining of various products

1st Sp. C1-axis : 0.0001°

2nd Sp. C2-axis : 0.001°

Spindle Oil Cooling

The 1st/2nd spindles have been fitted with cooling units as a standard feature to minimize thermal displacement generated during cutting works, maintain a constant temperature, and increase cutting stability.

1st

Max. Turning Dia.

2nd

Max. Turning Length

XM2600

XM3100

XM Series	XM2600		XM3100	
	1st	2nd	1st	2nd
Driving Methode	-		Built-In	
Max. Turning Dia.	mm(in)		Ø660 (Ø26")	
Max. Turing Length	mm(in)		1,540 (60.6")	
Chuck Size	inch	10"	12"	10"
Power (Max/Cont.)	kW(HP)	30/22 (40/29.5)	37/25 (50/33.5)	30/22 (40/29.5)
Bar Capacity*	mm(in)	Ø81 (Ø3.2")	Ø101 (Ø4")	Ø81 (Ø3.2")
Spindle Speed	r/min	4,000	3,000	4,000

*The 2nd spindle is equipped with a solid chuck (closed-center chuck) as standard. If you intend to perform bar machining using the 2nd spindle, please select the hollow chuck (open-center chuck) option.

05 LOWER TURRET (ST Type)

Lower turrets for improved productivity



Turret-attached Type Rest (ST Series) **OPTION**

It guarantees machining stability by preventing tilt and shaking during machining of products such as long shafts. SLU3.2 Rest can also be applied for machining large workpieces.

Turret Specifications

No. of Tools	Tool Size (O.D/I.D)	Indexing Time
12 EA	□25/Ø40 mm (Ø1"/Ø1 1/2")	0.2 sec



SIMULTANEOUS TURNING WITH THE MILLING HEADS

TURRET

Mill Turret **OPTION** (Std : Turning Turret)

The lower mill turret (Opt.) ensures the high-speed machining of complicated shapes in precision only with the one-time setting of an object to be machined with the mill head and complex machining.

- ◎ Speed (rpm) : 5,000 r/min
- ◎ Collet Size : Ø20 (0.8") / ER32
- ◎ Indexing Time : 0.2 sec

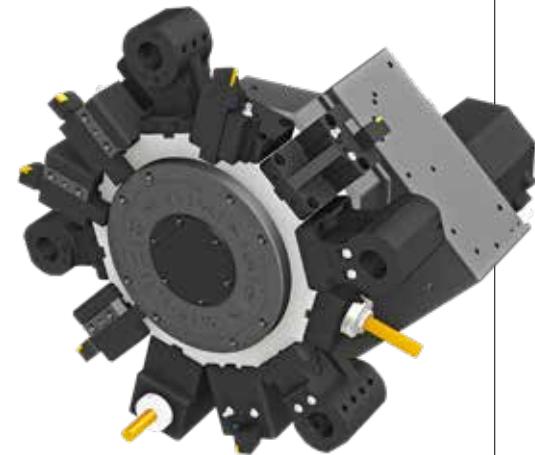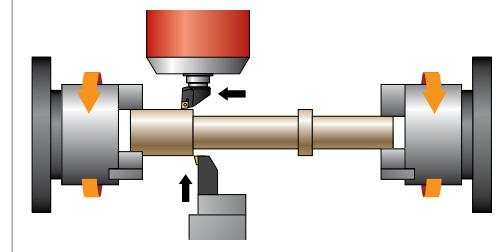

Enables Simultaneous Turning for Milling heads and Lower Turrets

The ST model, with its upper milling heads and lower turrets, enables simultaneous turning.

Simultaneous turning options for both OD ↔ end face and roughing OD ↔ finishing OD help improve the productivity.

SPECIAL HOLDER


OPTION

The XM2600ST/XM3100ST, compatible with a lower mill turret (optional), allow to process the keyway from the inside of the material using a connector attached to the rotary tool holder.

More importantly, it is a WIA machine tools's patented, customized solution for improving the tooling efficiency of new parts including motor housings for electric vehicles.

Mill Holders Attachments

- Offset length: 50 - 250mm (manufactured according to customer's workpieces)
- Applicable to both angular & straight milling heads
- The special holder (BMT45) is not compatible with BMT65 for lower turrets

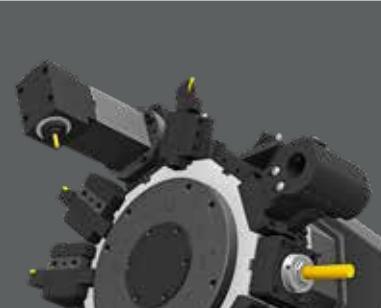

※ Consultation needed when ordering these options.

06 USER CONVENIENCE

Various Devices for User Friendly

The XM Series offers Ergonomic Design for
Easy Operability and Maintenance.



Improved Access with Larger Front Door

The adoption of a larger front door makes crane access for cutting preparation works, such as setting up workpieces, much easier.

Highly Accessible Spindle

The spindle's ergonomic design improves access for the chuck and makes it easier to set up workpieces. The height from the floor to the center of the spindle has been carefully considered in order to improve the operator's convenience when setting up work pieces.

Operation Panel

The arms for the OP box and the OP box can rotate independently, which makes operating convenient depending on the workpiece setting or worker position thus allowing the user to easily move the arms to desired location.



Optional

HIGH RIGIDITY, TOOL CHANGE SYSTEM

AUTOMATIC TOOL CHANGE SYSTEM

ATC & Magazine

There is a magazine on the front side of the machine for efficient tool exchange and setting, and tool exchange operation is simplified and highly reliable. The tools are also fed in the quickest routes, which allows prompt replacement of tools.




ATC Side Repair Window (80 ATC)

You can easily access the ATC through the side repair window if inspection or cleaning of the ATC is necessary.



Automated Tool Attachment/
Detachment Device (Std.)

The automated tool attachment/detachment device uses an air cylinder for easy tool attachment/detachment.

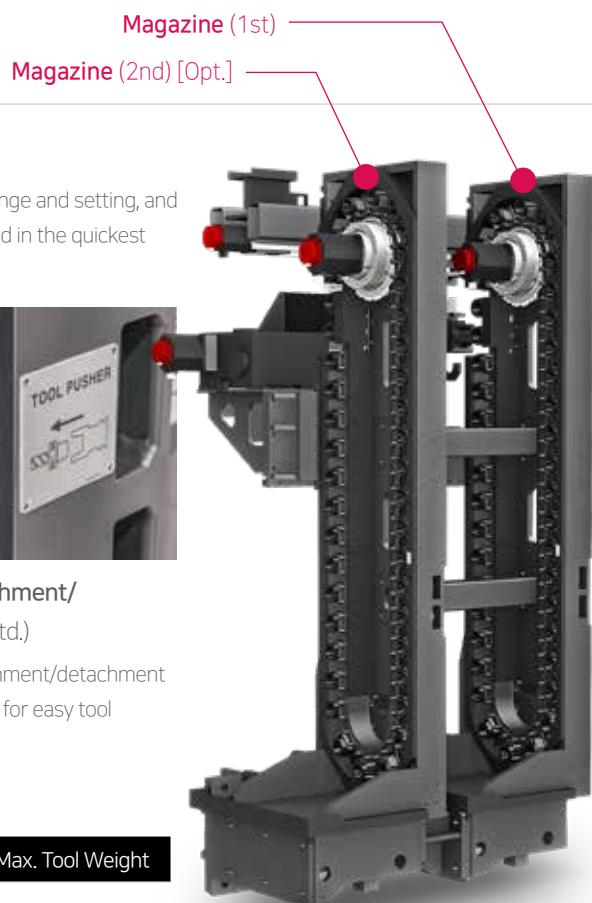

ATC & Magazine Specifications


No. of Tools	Max. Tool Length	Max. Tool Dia. (W.T/W.O)	Max. Tool Weight
40 [80] EA	450 mm (17.7")	Ø90/Ø130 (Ø3.5" /Ø5.1")	12 kg (46.3 lb)

① Internal Maintenance Foothold (Std.)

There is a foothold within the machine for the worker to be able to maintain a stable posture when accessing the equipment.

② Bed Lower Flushing (Std.)

The entire upper surface of the slide cover features a flushing structure, which allows the slide cover to be maintained in a clean state at all times (patented).

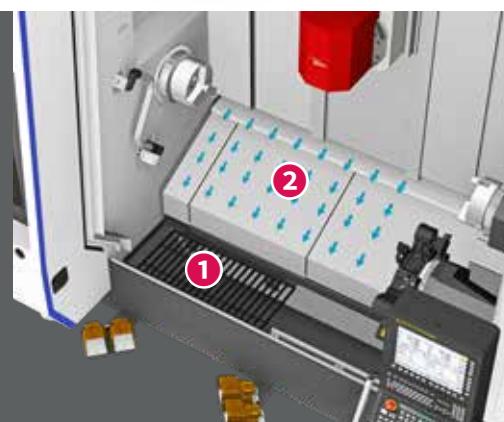

07 FANUC

The Compatible All-round Control

FANUC 31i-B5 Plus

This is the core model of FANUC CNC with the performance of the world highest level. With abundant functions and high-speed, highly-accurate and high-quality machining technology, it is the most suitable for a high-grade and machining center.

15" Touch Screen Monitor Applied

Control axis : 9 axis (X1, Y1, Z1, B1, X2, Z2, A, C1, C2)

Simultaneously controlled axis : 5 axis

Part program storage size : 4 Mbyte (1,024m)

No. of registerable programs : 1,000 EA

Tool offset pairs : 400 pairs

Look-ahead block : 1,000 block


Conversational auto program : Smart Guide i

The XM Series has a 15" large monitor for enhanced visibility. In particular, we can create more convenient use conditions by improving the operating environment such as program setup and simulation through a large screen.



Chip Breaking **OPTION**

- **Machining Method** : the tool cuts the workpiece moving in a zigzag pattern. (Oscillating) → Air cut section occurs → Long chips break
- **Advantage** : Increase tool life, Enhance surface finishing, Improve chip disposal
- **Machine** : All turning centers with FANUC controller (Option)

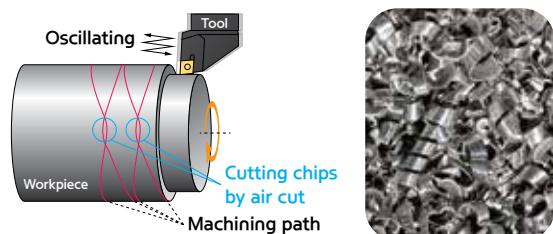


(Developed special screen page for servo learning oscillation function / Even when this function is applied, the cycle time remains same.)

8Ch. Thermal displacement compensation **OPTION**




Control Software

Thermal Sensor

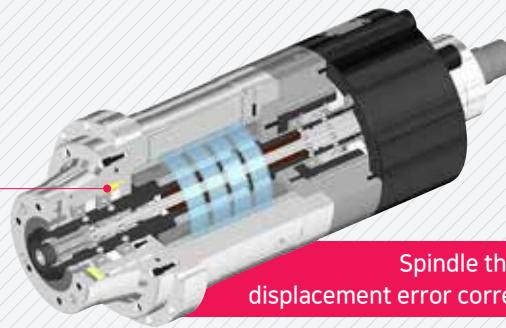

Spindle thermal displacement error correction

Thermal Sensor

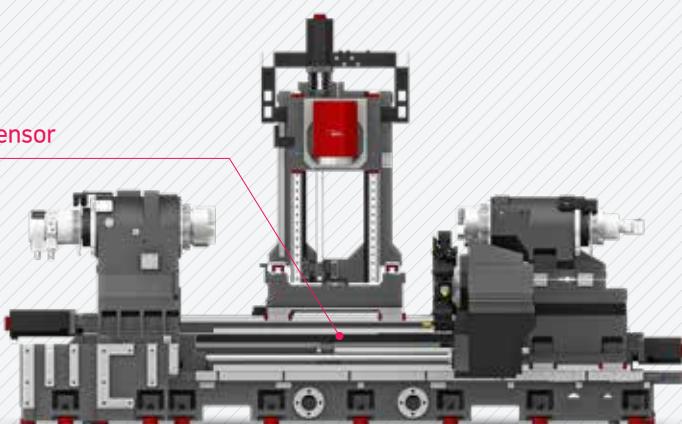


Structure thermal displacement error correction

Machine tools generate thermal displacement due to heat during machining.

WIA machine tools detect thermal changes through thermal sensors installed on the main thermal sources of the machine.

In addition, a thermal displacement compensation device that predicts the amount of thermal displacement according to the amount of thermal change and provides a command to the motor with a compensated value to maintain consistent precision is provided as an option.

SMART CNC (FANUC Smart Plus)

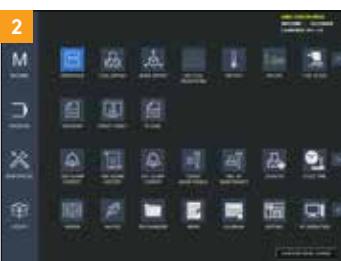

1. Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

2. LAUNCHER

This software offers shortcuts for quick access to specialized features and frequently used features.

SPECIFICATIONS

Standard & Optional (XM2600 Series)

Spindle	2600	2600S	2600ST
1st Sp. Hollow Chuck 3 Jaw	10"	●	●
1st Sp. Solid Chuck 3 Jaw	10"	○	○
2st Sp. Hollow Chuck 3 Jaw	10"	-	○
2st Sp. Solid Chuck 3 Jaw	10"	-	●
Standard Soft Jaw (1set)		●	●
Chuck Clamp Foot Switch		●	●
2 Steps Hyd. Pressure Device	☆	☆	☆
Spindle Inside Stopper	☆	☆	☆
Chuck Open/Close Confirmation Device	●	●	●
Chuck Pressure Check Switch	●	●	●
C-Axis	1st (0.0001")	●	●
	2nd (0.001")	-	●
Feed System			
	X1, Y, Z1	●	●
Ball Screw Nut Cooling	A	-	☆
	X2, Z2	-	☆
Mill Head			
Tool Shank Type	CAPTO C6	●	●
ATC & Magazine			
ATC Extension	40 Tool	●	●
	80 Tool	○	○
Lower Turret			
Tool Holder	12EA	-	-
Mill Turret	BMT	-	-
Straight Milling Head	Adapter Type, 1ea	-	-
Angular Milling Head	Adapter Type, 1ea	-	-
Mill Holder Attachment	BMT45	-	-
Boring Sleeve		-	○
Drill Socket		-	○
Angle Head		-	☆
Tail Stock & Steady Rest			
Programable NC Servo Tail Stock (MT#5)		●	-
Standard Live Center		●	-
	SLU-3.1	○	○
Steady Rest	SLU-3.2	○	○
	SLU-4	○	○
	SLU-5	○	○
	SLU-5.1	○	○
	Lower Tool Mount Steady Rest (SLU 3.2)	-	-
Coolant & Air Blow			
Standard Coolant (Mill Front)	●	●	●
Chuck Coolant (Upper Chuck)	○	○	○
Gun Coolant	○	○	○
Shower Coolant (Bed Flushing)	●	●	●
Through Spindle Coolant (Only for Special Chuck)	☆	☆	☆
Thru Coolant for Live Tool	-	-	☆
Chuck Air Blow (Upper Chuck)	○	○	○
2nd Spindle Air Blow	-	○	○
Turret Air Blow	-	-	☆
Air Gun	○	○	○
Through Spindle Air Blow (Only for Special Chuck)	☆	☆	☆
High-pressure Coolant	20/30/70 bar	○	○
Power Coolant System (For Automation)	☆	☆	☆
Coolant Chiller	☆	☆	☆
Chip Disposal			
Coolant Tank	620 l (163.8 gal)	●	●
Chip Conveyor (Hinge/Scraper)	Front (Right)	○	○
Special Chip Conveyor (Drum Filter)		☆	☆
Chip Wagon	Standard (180 l [47.5 gal])	○	○
	Swing (200 l [52.8 gal])	○	○
	Large Swing (290 l [76.6 gal])	○	○
	Large Size (330 l [87.2 gal])	○	○
	Customized	☆	☆

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable

Electric Device	2600	2600S	2600ST
Call Light & Buzzer	3Color : ■ ■ ■ B	●	●
Electric Cabinet Light		○	○
Remote MPG	●	●	●
Electrical Circuit Breaker	○	○	○
AVR (Auto Voltage Regulator)	☆	☆	☆
Transformer	80kVA	○	○
Auto Power Off		○	○
Measurement			
Auto Q-Setter	Lower Turret	-	-
Work Close Confirmation Device (Only for Special Chuck)	TACO	○	○
SMC	○	○	○
Tool Length Measuring Device (Mill Head)	Touch	○	○
	Contactless-NC4	○	○
Automatic Workpiece Measuring Device	RMP600	○	○
HWTM (Tool Monitoring System)		○	○
Linear Scale	X1/Y1/Z1 Axis	○	○
	X2/Z2 Axis	-	-
Coolant Level Sensor (Only for Chip Conveyor)	☆	☆	☆
Environment			
Air Conditioner	○	○	○
Oil Mist Collector	☆	☆	☆
Oil Skimmer (Only for Chip Conveyor)	○	○	○
MQL (Minimal Quantity Lubrication)	☆	☆	☆
Fixture & Automation			
Auto Door	○	○	○
Auto Shutter (Only for Automatic System)	☆	☆	☆
Sub Operation Panel	☆	☆	☆
Extra M-Code 4ea	○	○	○
Automation Interface	☆	☆	☆
Hyd. Device			
Standard Hyd. Unit : 4.5Mpa/45 l (11.9 gal)	●	●	●
S/W			
WIA Smart Software	●	●	●
Thermal Compensation	●	●	●
DNC software (HW-eDNC)	○	○	○
Safety Device			
Back Spin Torque Limiter (BST)	●	●	●
Total Splash Guard	●	●	●
Chuck Hydraulic Pressure Maintenance Interlock	☆	☆	☆
ETC			
Tool Box	●	●	●
Customized Color	Need Munsell No.	☆	☆
CAD & CAM Software		☆	☆
Thermal displacement compensation	●	●	●

※ ST Series : Lower Tool Mount Steady Rest

Specifications are subject to change without notice for improvement.

SPECIFICATIONS

Standard & Optional (XM3100 Series)

		3100	3100S	3100ST
Spindle				
1st Sp. Hollow Chuck 3 Jaw	12"	●	●	●
1st Sp. Solid Chuck 3 Jaw	12"	○	○	○
2st Sp. Hollow Chuck 3 Jaw	10"	-	○	○
2st Sp. Solid Chuck 3 Jaw	10"	-	●	●
Standard Soft Jaw (1set)		●	●	●
Chuck Clamp Foot Switch		●	●	●
2 Steps Hyd. Pressure Device		☆	☆	☆
Spindle Inside Stopper		☆	☆	☆
Chuck Open/Close Confirmation Device		●	●	●
Chuck Pressure Check Switch		●	●	●
C-Axis	1st (0.0001")	●	●	●
	2nd (0.001")	-	●	●
Feed System				
	X1, Y, Z1	●	●	●
Ball Screw Nut Cooling	A	-	☆	☆
	X2, Z2	-	-	☆
Mill Head				
Tool Shank Type	CAPTO C6	●	●	●
ATC & Magazine				
ATC Extension	40 Tool	●	●	●
	80 Tool	○	○	○
Lower Turret				
ToolHolder	12EA	-	-	●
Mill Turret	BMT	-	-	○
Straight Milling Head	Adapter Type, 1ea	-	-	○
Angular Milling Head	Adapter Type, 1ea	-	-	○
Mill Holder Attachment	BMT45	-	-	☆
Boring Sleeve		-	-	○
Drill Socket		-	-	○
Angle Head		-	-	☆
Tail Stock & Steady Rest				
Programmable NC Servo Tail Stock (MT#5)		●	-	-
Standard Live Center		●	-	-
	SLU-3.1	○	○	○
Steady Rest	SLU-3.2	○	○	○
	SLU-4	○	○	-
	SLU-5	○	○	-
	SLU-5.1	○	○	-
Lower Tool Mount Steady Rest (SLU 3.2)		-	-	○
Coolant & Air Blow				
Standard Coolant (Mill Front)		●	●	●
Chuck Coolant (Upper Chuck)		○	○	○
Gun Coolant		○	○	○
Shower Coolant (Bed Flushing)		●	●	●
Through Spindle Coolant (Only for Special Chuck)		☆	☆	☆
Thru Coolant for Live Tool		-	-	☆
Chuck Air Blow (Upper Chuck)		○	○	○
2nd Spindle Air Blow		-	○	○
Turret Air Blow		-	-	☆
Air Gun		○	○	○
Through Spindle Air Blow (Only for Special Chuck)		☆	☆	☆
High-pressure Coolant	20/30/70 bar	○	○	○
Power Coolant System (For Automation)		☆	☆	☆
Coolant Chiller		☆	☆	☆
Chip Disposal				
Coolant Tank	620 l (163.8 gal)	●	●	●
Chip Conveyor (Hinge/Scraper)	Front (Right)	○	○	○
Special Chip Conveyor (Drum Filter)		☆	☆	☆
	Standard (180 l [47.5 gal])	○	○	○
Chip Wagon	Swing (200 l [52.8 gal])	○	○	○
	Large Swing (290 l [76.6 gal])	○	○	○
	Large Size (330 l [87.2 gal])	○	○	○
	Customized	☆	☆	☆

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable





		3100	3100S	3100ST
Electric Device				
Call Light & Buzzer	3Color : ■ ■ ■ B	●	●	●
Electric Cabinet Light		○	○	○
Remote MPG		●	●	●
Electric Circuit Breaker		○	○	○
AVR (Auto Voltage Regulator)		☆	☆	☆
Transformer	80kVA	○	○	○
Auto Power Off		○	○	○
Measurement				
Auto Q-Setter	Lower Turret	-	-	○
Work Close Confirmation	TACO	○	○	○
Device (Only for Special Chuck)	SMC	○	○	○
Tool Length Measuring Device	Touch	○	○	○
(Mill Head)	Contactless-NC4	○	○	○
Automatic Workpiece Measuring Device	RMP600	○	○	○
HWTM (Tool Monitoring System)				
	X1/Y1/Z1 Axis	○	○	○
Linear Scale	X2/Z2 Axis	-	-	○
Coolant Level Sensor (Only for Chip Conveyor)		☆	☆	☆
Environment				
Air Conditioner		○	○	○
Oil Mist Collector		☆	☆	☆
Oil Skimmer (Only for Chip Conveyor)		○	○	○
MQL (Minimal Quantity Lubrication)		☆	☆	☆
Fixture & Automation				
Auto Door		○	○	○
Auto Shutter (Only for Automatic System)		☆	☆	☆
Sub Operation Pannel		☆	☆	☆
Extra M-Code 4ea		○	○	○
Automation Interface		☆	☆	☆
Hyd. Device				
Standard Hyd. Unit : 4.5Mpa/45 l (11.9 gal)		●	●	●
S/W				
WIA Smart Software		●	●	●
Thermal Compensation		●	●	●
DNC software (HW-eDNC)		○	○	○
Safety Device				
Back Spin Torque Limiter (BST)		●	●	●
Total Splash Guard		●	●	●
Chuck Hydraulic Pressure Maintenance Interlock		☆	☆	☆
ETC				
Tool Box		●	●	●
Customized Color	Need Munsell No.	☆	☆	☆
CAD & CAM Software		☆	☆	☆
Thermal displacement compensation		●	●	●

※ ST Series : Lower Tool Mount Steady Rest

Specifications are subject to change without notice for improvement.

SPECIFICATIONS


Spindle Output/Torque Diagram

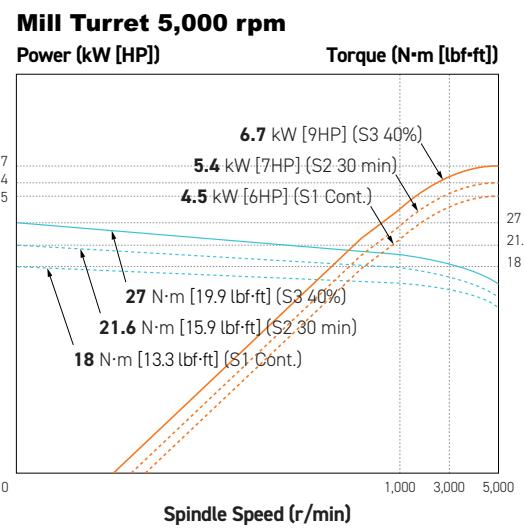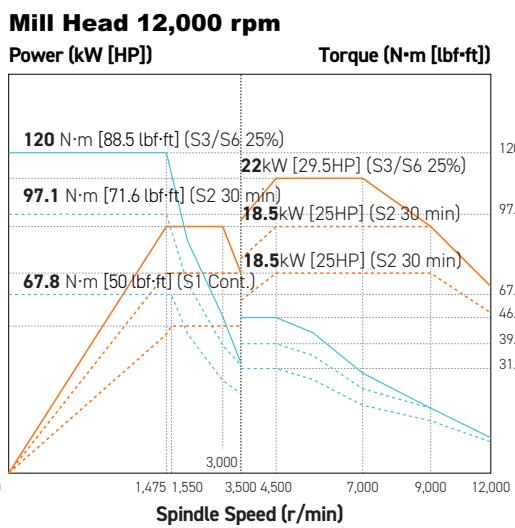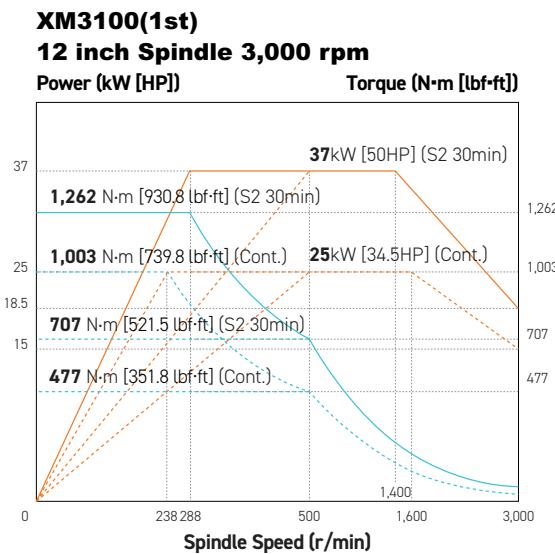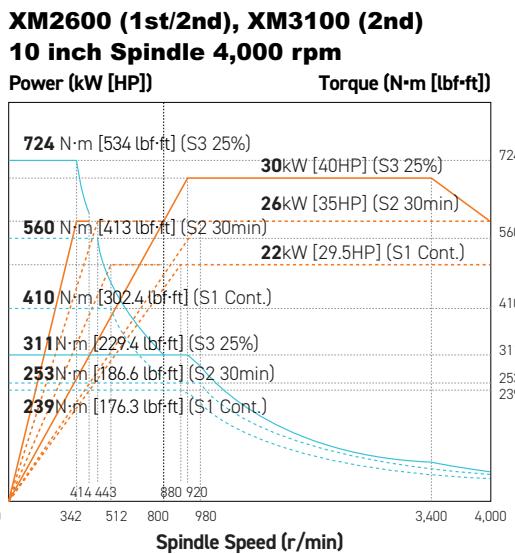

SPECIFICATIONS

External Dimensions


unit : mm(in)

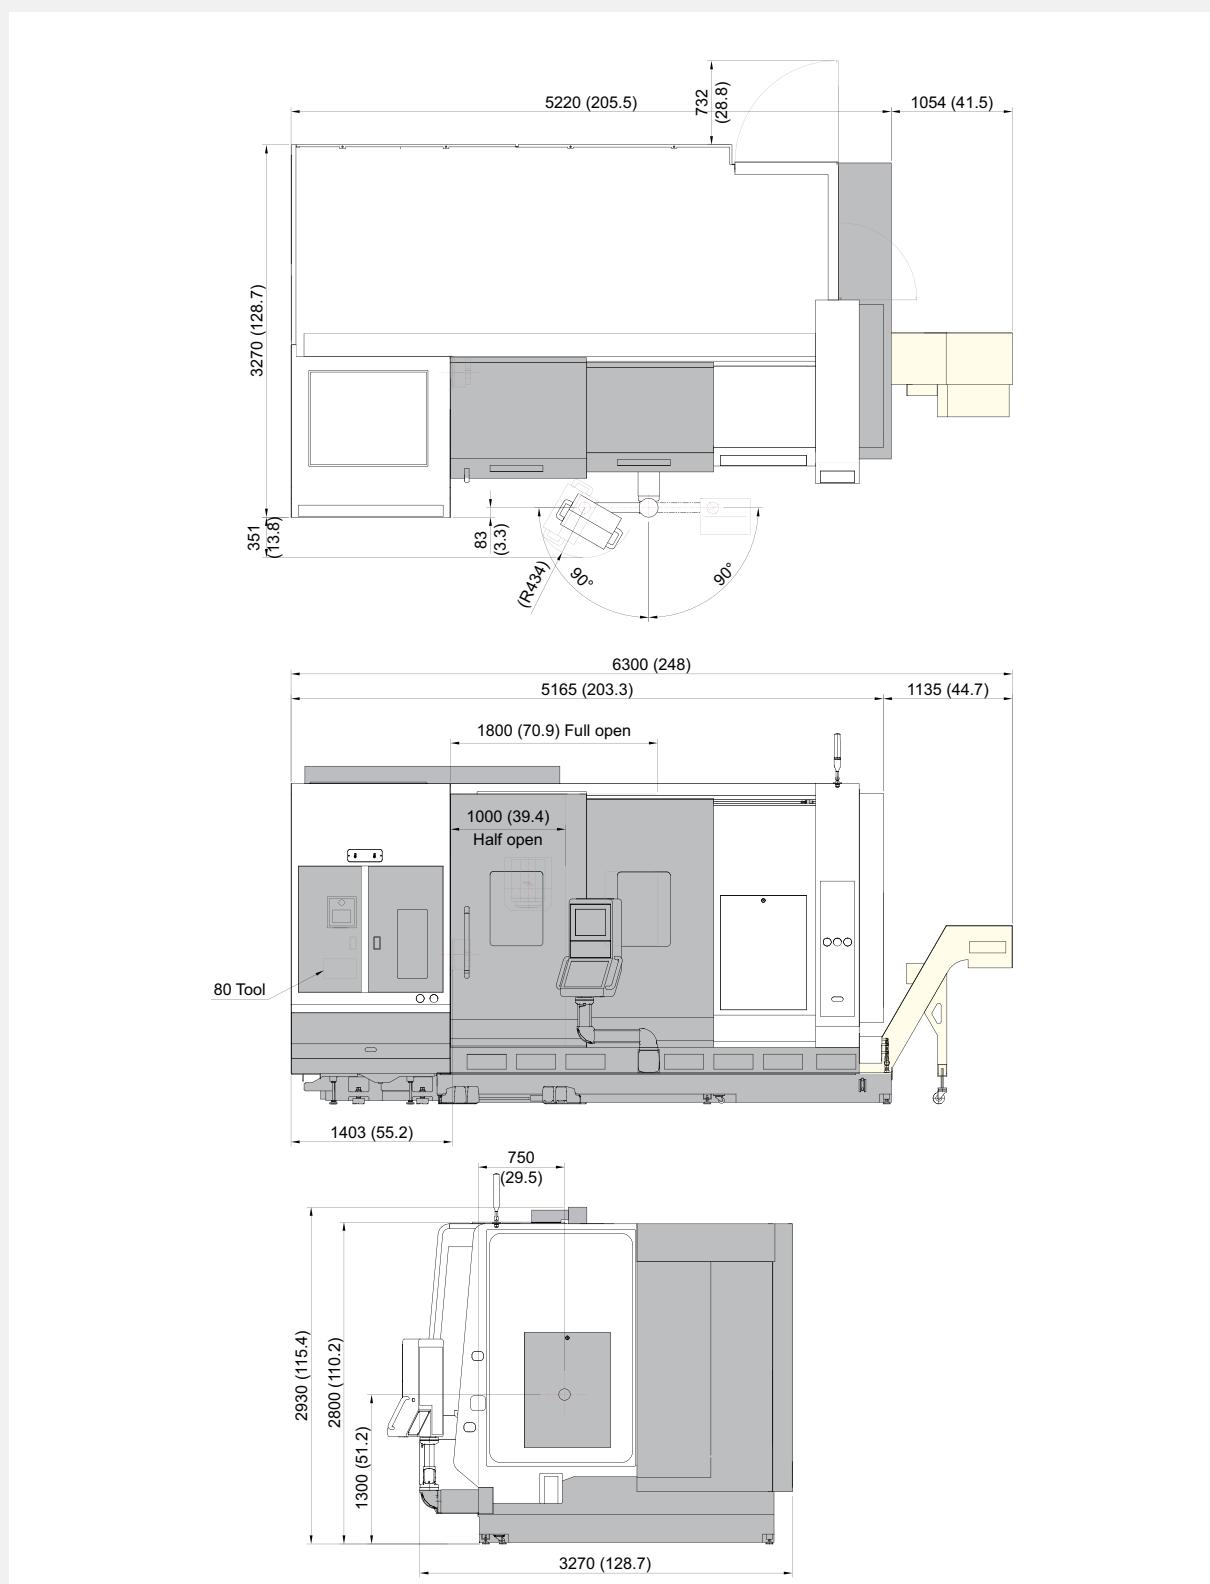

SPECIFICATIONS

Tooling System

unit : mm(in)

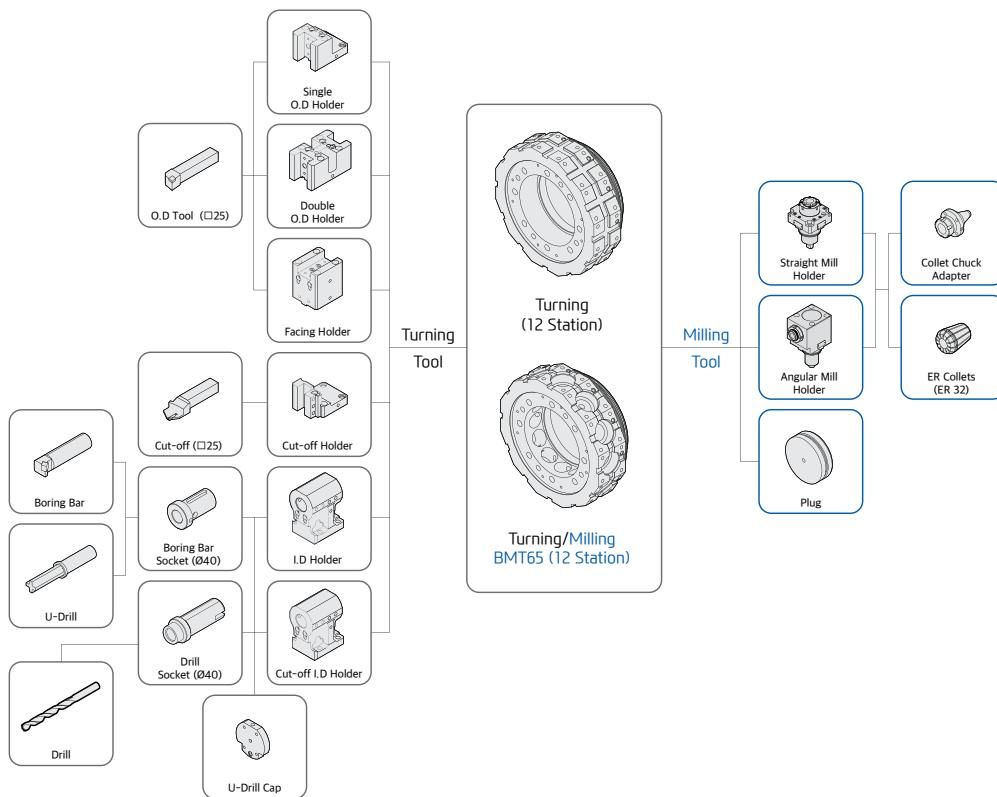

Tooling Parts Detail


ITEM		XM2600ST / XM3100ST	
		Turning (Std.)	Milling (Opt.)
Turning Holder	O.D Holder	Right/Left	3
		Double	2
	Facing Holder		1
Boring Holder	Cutting Holder		1
	I.D Holder	Single	3
	Off-set I.D Holder		2
Driven Holder	U-Drill Cap		1
	Straight Mill Holder		-
	Angular Mill Holder		-
Socket	Boring	Ø10 (Ø3/8")	1
		Ø12 (Ø1/2")	1
		Ø16 (Ø5/8")	1
		Ø20 (Ø3/4")	1
		Ø25 (Ø1")	1
		Ø32 (1 1/4")	1
	Drill	MT 1xMT 2	1
		MT 2	1
	ER Collet		-
	Adapter Set		1 Set

SPECIFICATIONS

Interference


unit : mm(in)

Y-AXIS & TURRET

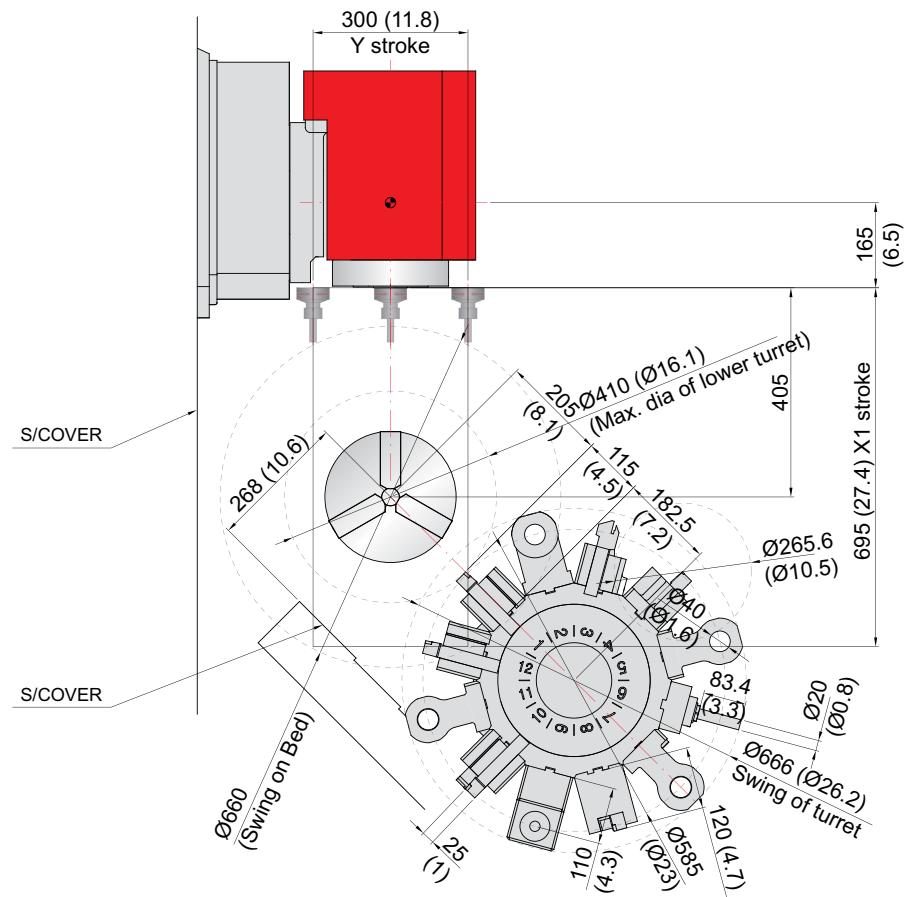

MILL HEAD



B-AXIS

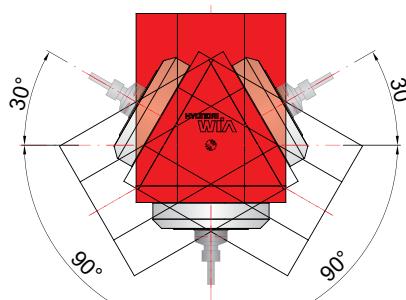

SPECIFICATIONS

Mill Head Tooling Travel Range (XM2600 Series | XM3100 Series)

unit : mm(in)

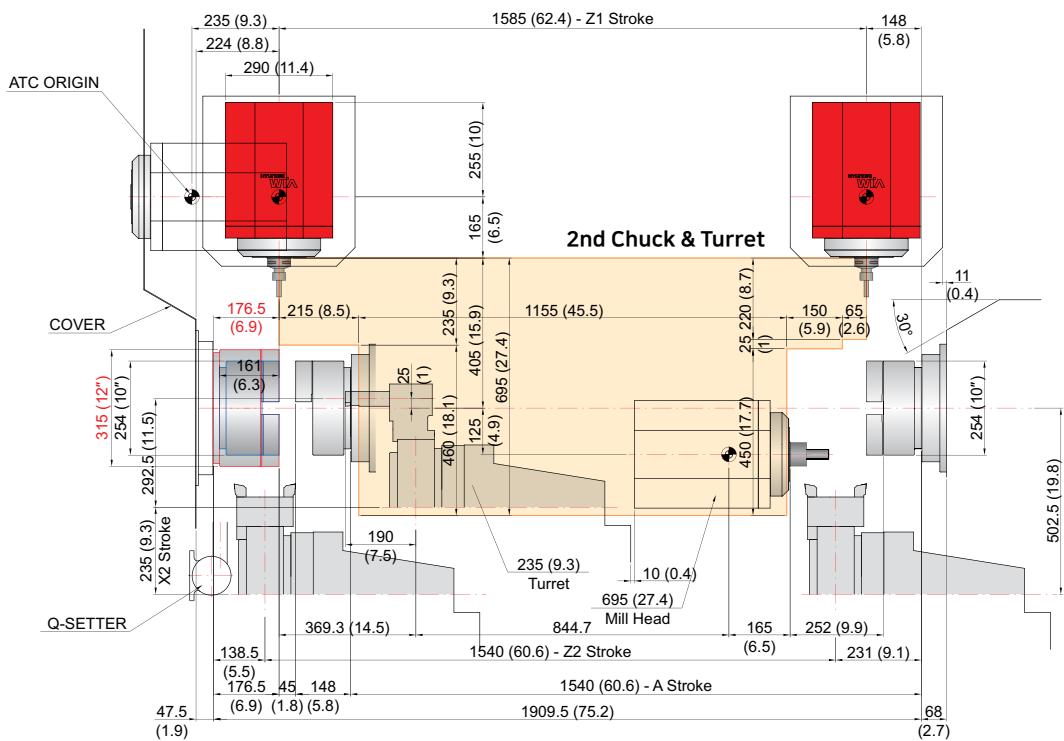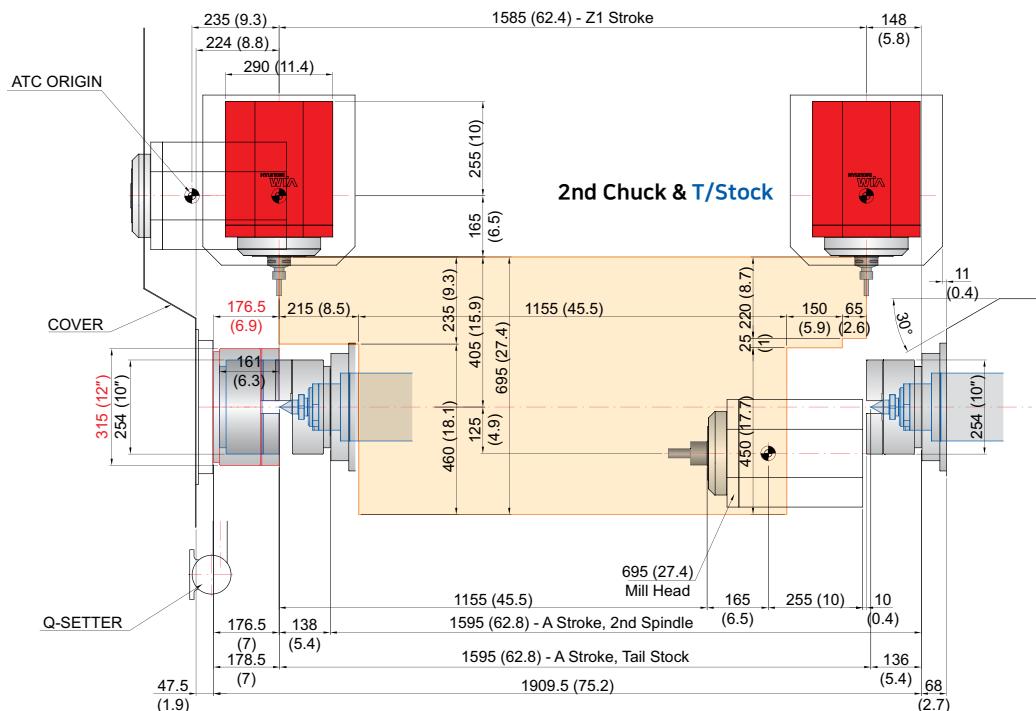


SPECIFICATIONS


Turret Tooling Travel Range

unit : mm(in)

OD Holder

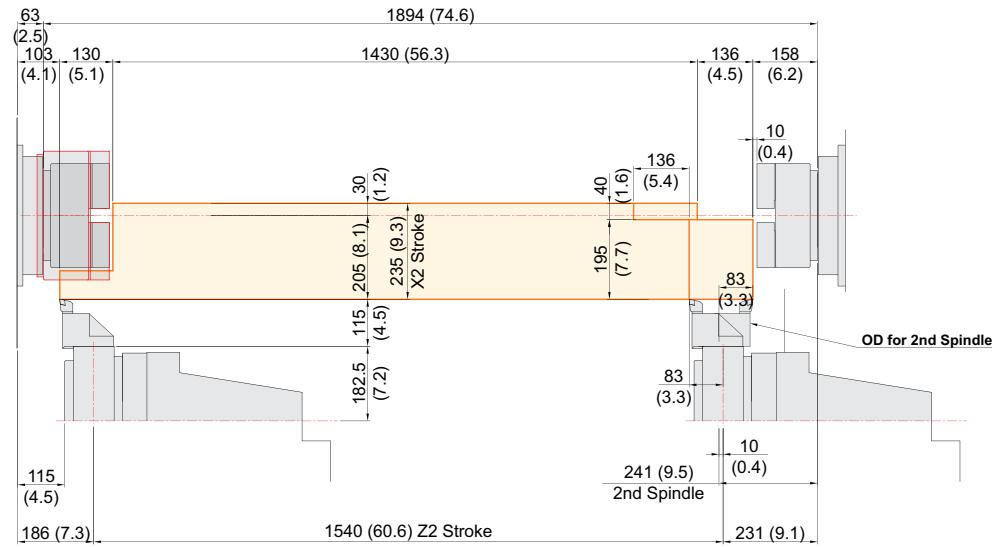

Boring Holder

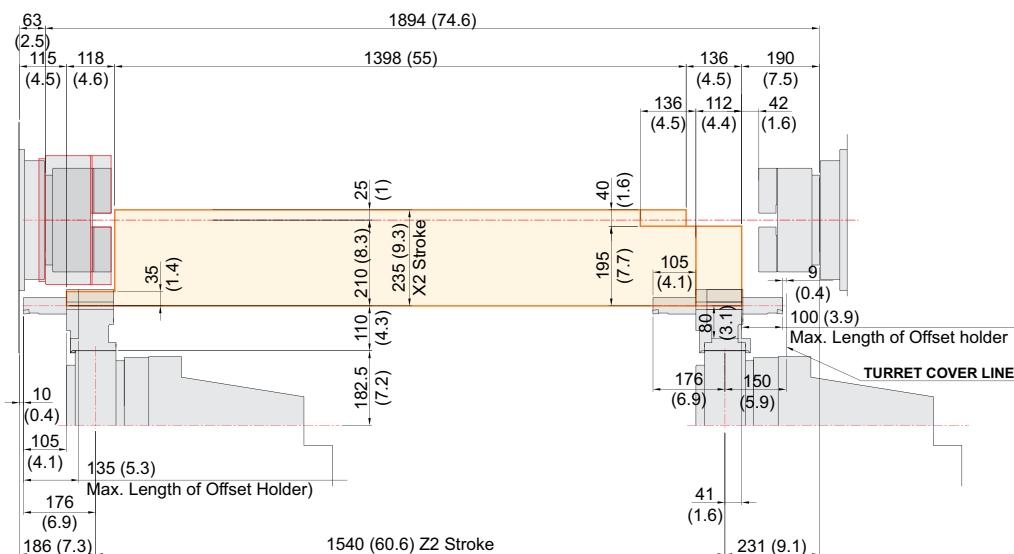


SPECIFICATIONS


Turret T Tooling Travel Range

unit : mm(in)

Angular Milling Holder

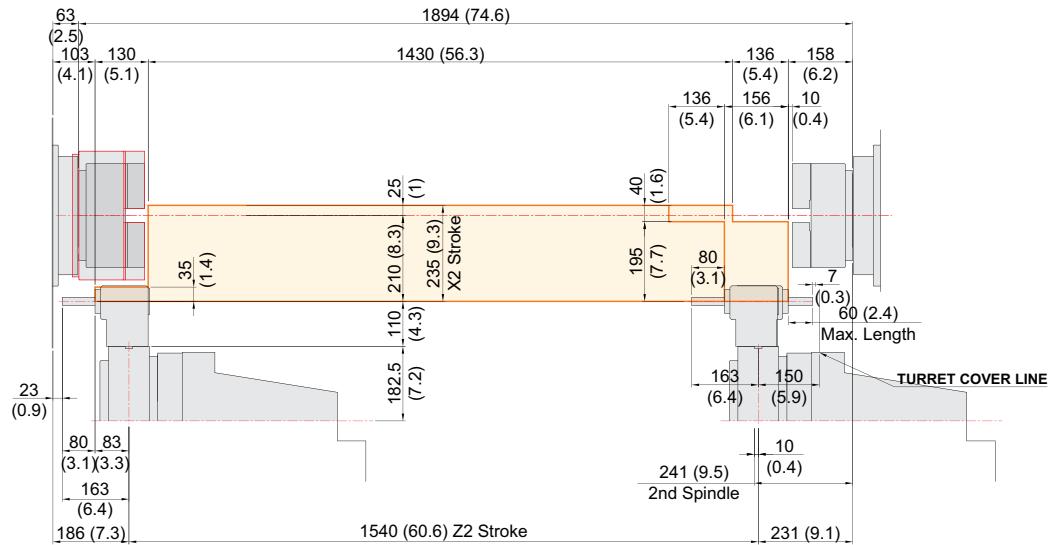

Straight Milling Holder

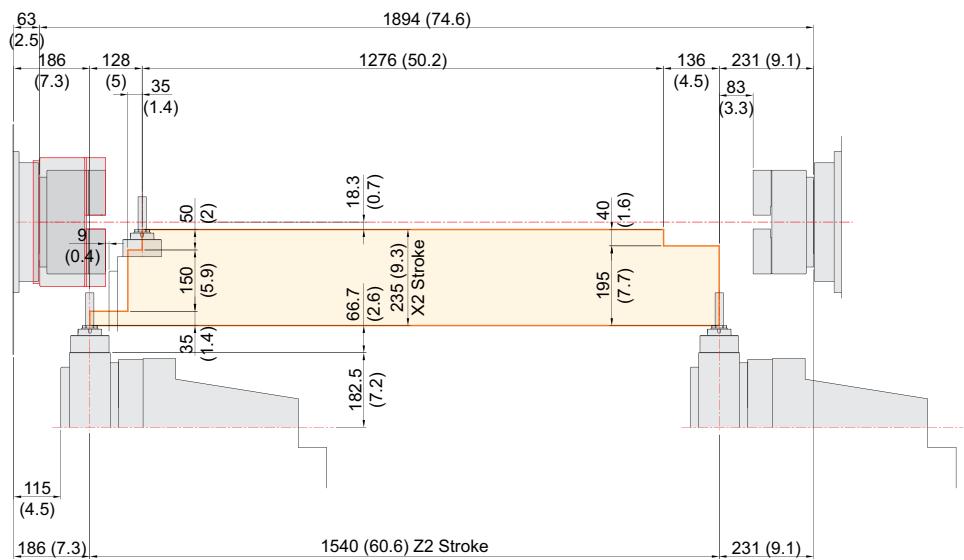

SPECIFICATIONS

Specifications

[] : Option

ITEM		XM2600	XM2600S	XM2600ST
CAPACITY	Max. Turning Dia.	Mill Head mm(in)	Ø660 (Ø26")	
	Turret	mm(in)	-	Ø410 (Ø16.1")
	Max. Turing Length	mm(in)	1,540 (60.6")	
	Bar Capacity	mm(in)	Ø81 (Ø3.2")	1st : Ø81 (Ø3.2") *2nd : Ø81 (Ø3.2")
SPINDLE	Chuck Size	inch	10"	1st : 10" 2nd : 10"
	Spindle Speed	r/min	4,000	1st : 4,000 2nd : 4,000
	Spindle Power (Max./Cont.)	kW(HP)	30/22 (40/29.5)	1st : 30/22 (40/29.5) 2nd : 30/22 (40/29.5)
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	724/410 (534/302.4)	1st : 724/410 (534/302.4) 2nd : 724/410 (534/302.4)
	Spindle Bore	mm(in)	Ø91 (Ø3.6")	1st : Ø91 (Ø3.6") 2nd : Ø91 (Ø3.6")
	Spindle Driving Methode	-		BUILT-IN MOTOR
	Spindle Nose	-	A2-8	1st : A2-8 2nd : A2-8
FEED	C axis Indexing Angle	deg	0.0001°	1st : 0.0001° 2nd : 0.001°
	Travel	X1/Y/Z1 mm(in)	695/300 (±150)/1,585 (27.4"/11.8" (±5.9")/62.4")	695/300 (±150)/1,540 (27.4"/11.8" (±5.9")/60.6")
		A/X2/Z2 mm(in)	1,595/-/- (62.8"/-/-)	1,540/235/1,595 (60.2"/9.3"/62.8")
	Rapid Traverse	X1/Y/Z1 m/min (ipm)	48/36/48 (1,890/1,417/1,890)	
	Rate	A/X2/Z2 m/min (ipm)	30/-/- (1,181/-/-)	30/24/36 (1,181/945/1,417)
	Slide Type	-	LM GUIDE	
MILL HEAD	Y Axis Structure	-	Cross Type	
	Speed	r/min	12,000	
	Power (Max./Cont.)	kW(HP)	22/15 (29.5/20)	
	Torque (Max./Cont.)	N·m(lbf·ft)	120/67.8 (88.5/50)	
	Driven Type	-	BUILT-IN MOTOR	
TURRET	B Axis Angle	deg	Rotation : 240° (±120°)/Indexing : 0.0001°	
	No. of Tools	EA	-	12
	Tool Size (O.D./I.D.)	-	-	□25/Ø40 (□1"/Ø1 1/2")
	Indexing Time	sec/step	-	0.2
MILL TURRET (OPTION)	Milling Tool Speed (rpm)	r/min	-	[5,000]
	Max. Power	kW(HP)	-	[6.7 (9)]
	Max. Torque	N·m(lbf·ft)	-	[27 (19.9)]
	Type	-	-	[BMT65]
TAIL STOCK	Taper	-	MT #5	-
	Type	-	NC Servo	-
	Travel	mm(in)	1,595 (62.8")	-
ATC	No. of Tools	EA	40 [80]	
	Tool Shank Type	-	CAPTO C6	
	Max. Tool Dia. (W.T/W.O)	mm(in)	Ø90/Ø130 (Ø3.5"/Ø5.1")	
	Max. Tool Length	mm(in)	450 (17.7")	
	Max. Tool Weight	kg(lb)	12 (26.5)	
	Tool Selection Method	-	FIXED ADDRESS	
TANK CAPACITY	Coolant Tank	l (gal)	620 (163.8)	
	Lubricating Tank	l (gal)	Axis : 3 (0.8)/Mill Head : 1.8 (0.5)	
POWER SUPPLY	Electric Power Supply	kVA	78	
	Thickness of Power Cable	Sq	Over 70	
	Voltage	V/Hz	220/60 (200/50)	
MACHINE	Floor Space(L×W)	mm(in)	5,165×3,270 (203.3"×128.7")	
	Height	mm(in)	2,930 (115.4")	
	Weight	kg(lb)	17,000 (37,479)	18,000 (39,683)
CNC	Controller	-	FANUC 31i-B5 Plus	

Specifications are subject to change without notice for improvement.

*The 2nd spindle is equipped with a solid chuck (closed-center chuck) as standard. If you intend to perform bar machining using the 2nd spindle, please select the hollow chuck (open-center chuck) option.

SPECIFICATIONS

Specifications

[] : Option

ITEM		XM3100	XM3100S	XM3100ST
CAPACITY	Max. Turning Dia.	Mill Head mm(in)	Ø660 (Ø26")	
	Turret	mm(in)	-	Ø410 (Ø16.1")
	Max. Turning Length	mm(in)	1,540 (60.6")	
	Bar Capacity	mm(in)	Ø102 (Ø4")	1st : Ø102 (Ø4") *2nd : Ø81 (Ø3.2")
SPINDLE	Chuck Size	inch	12"	1st : 12" 2nd : 10"
	Spindle Speed	r/min	3,000	1st : 3,000 2nd : 4,000
	Spindle Power (Max./Cont.)	kW(HP)	37/25 (50/33.5)	1st : 37/25 (50/33.5) 2nd : 30/22 (40/29.5)
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	1,262/1,003 (930.8/739.8)	1st : 1,262/1,003 (930.8/739.8) 2nd : 724/410 (534/302.4)
	Spindle Bore	mm(in)	Ø115 (Ø4.5")	1st : Ø115 (Ø4.5") 2nd : Ø91 (Ø3.6")
	Spindle Driving Methode	-	BUILT-IN MOTOR	
	Spindle Nose	-	A2-11	1st : A2-11 2nd : A2-8
FEED	C axis Indexing Angle	deg	0.0001°	1st : 0.0001° 2nd : 0.001°
	Travel	X1/Y/Z1 mm(in)	695/300[±150]/1,585 (27.4"/11.8"[±5.9"]/62.4")	695/300[±150]/1,540 (27.4"/11.8"[±5.9"]/60.6")
		A/X2/Z2 mm(in)	1,595/- (62.8"/-/-)	1,540/235/1,595 (60.2"/9.3"/62.8")
	Rapid Traverse Rate	X1/Y/Z1 m/min (ipm)	48/36/48 (1,890/1,417/1,890)	
		A/X2/Z2 m/min (ipm)	30/-/- (1,575/-/-)	30/24/36 (1,575/945/1,417)
	Slide Type	-	LM GUIDE	
	Y Axis Structure	-	Cross Type	
MILL HEAD	Speed	r/min	12,000	
	Power (Max./Cont.)	kW(HP)	22/15 (29.5/20)	
	Torque (Max./Cont.)	N·m(lbf·ft)	120/67.8 (88.5/50)	
	Driven Type	-	BUILT-IN MOTOR	
	B Axis Angle	deg	Rotation : 240° (±120°)/Indexing : 0.0001°	
TURRET	No. of Tools	EA	-	12
	Tool Size (O.D/I.D)	-	-	□25/Ø40 (□1"/Ø1 1/2")
	Indexing Time	sec/step	-	0.2
MILL TURRET (OPTION)	Milling Tool Speed (rpm)	r/min	-	[5,000]
	Max. Power	kW(HP)	-	[6.7 (9)]
	Max. Torque	N·m(lbf·ft)	-	[27 (19.9)]
	Type	-	-	[BMT65]
TAIL STOCK	Taper	-	MT #5	-
	Type	-	NC Servo	-
	Travel	mm(in)	1,595 (62.8")	-
ATC	No. of Tools	EA	40 [80]	
	Tool Shank Type	-	CAPTO C6	
	Max. Tool Dia. (W.T/W.O)	mm(in)	Ø90/Ø130 (Ø3.5"/Ø5.1")	
	Max. Tool Length	mm(in)	450 (17.7")	
	Max. Tool Weight	kg(lb)	12 (26.5)	
	Tool Selection Method	-	FIXED ADDRESS	
TANK CAPACITY	Coolant Tank	l (gal)	620 (163.8)	
	Lubricating Tank	l (gal)	Axis : 3 (0.8)/Mill Head : 1.8 (0.5)	
POWER SUPPLY	Electric Power Supply	kVA	78	
	Thickness of Power Cable	Sq	Over 70	
	Voltage	V/Hz	220/60 (200/50)	
MACHINE	Floor Space(L×W)	mm(in)	5,165×3,270 (203.3"×128.7")	
	Height	mm(in)	2,930 (115.4")	
	Weight	kg(lb)	17,000 (37,479)	18,000 (39,683)
CNC	Controller	-	FANUC 31i-B5 Plus	

Specifications are subject to change without notice for improvement.

*The 2nd spindle is equipped with a solid chuck (closed-center chuck) as standard. If you intend to perform bar machining using the 2nd spindle, please select the hollow chuck (open-center chuck) option.

CONTROLLER

FANUC 31i-B5 Plus

Controlled axis / Display		Sub / Spindle functions
Control axis	9 axis (X1, Y1, Z1, B1, X2, Z2, A, C1, C2)	Miscellaneous function
Simultaneously controlled axis	Max. 5 axis	Spindle speed command
Least setting Unit	X, Z, Y, B axis : 0.001 mm (0.0001 inch)	Spindle speed override
	C, B axis : 1 deg [0.001] deg	Spindle orientation
Least input increment	X, Z, Y, B axis : 0.001 mm (0.0001 inch)	Rigid tapping
	C, B axis : 1 deg [0.001] deg	
Inch / Metric conversion	G20 / G21	Tool functions / Tool compensation
Machine lock	All axis	Tool function
Stored stroke check 1		Cutter compensation C
Mirror image		Tool length compensation
Follow-up		Tool length measurement
Backlash compensation	+/- 0~9999 pulse (Rapid traverse / Cutting feed)	Tool offset pairs
Position switch		Tool life management
Pitch error compensation		
LCD/MDI	15" color LCD	Data input / Output & Editing functions
Operation		Input/output interface
DNC operation by the memory card		Memory card
Program restart		Embedded Ethernet
Program check function	Dry run, Program check	Part program storage length
Single block		Registered programs
Feed function		Memory lock
Manual jog feed	Rapid, Jog, handle	Back ground editing
Manual handle	x1, x10, x100 pulses	Extended part program editing
Feedrate override	0~200% (10% Unit)	
Jog feed	0~5,000 mm/min (197 ipm)	Setting, display, diagnosis
Rapid traverse override	F1, F25%, F50%, F100%	Self-diagnosis function
Override cancel		History display
Rapid traverse bell-shaped acceleration / deceleration		Alarm & operator message
Auto corner override		Run hour / Parts count display
Program input & Interpolation functions		Actual cutting feedrate display
Interpolation Function	Positioning/Linear/Circular (G00/G01/G02/G03)	Graphic display
Exact stop mode / Exact stop	G61 / G09	Spindle / Servo setting screen
Dwell	G04, 0~9999.9999sec	Multi-language display
Helical interpolation		Selection of 5 optional language
Threading/synchronous feed		Screen Saver
Manual reference point return		Auto Data Backup
Reference point return	G28	
Reference point return check	G27	
2nd Reference point return	G30	
Program stop/end	M00, M01/M02, M30	Option
Optional block skip	1 ea	Additional work coordinate system
Max. programmable dimensions	+/- 9999.9999" (+/- 8digit)	G54.1 P1~P300 (300杰)
Program number / Sequence number	04 / N8 digit	Single direction positioning
Absolute/incremental command	G90 / G91	G60
Plane selection	G17, G18, G19	Scaling
Work coordinate preset	G52~G59	Manual handle interrupt
Work coordinate system	G54.1 P1~P48 (48 pair)	Data server
Manual absolute	"On" fixed	1 GB
Programmable data input	G10	High speed ethernet
Sub program call	10 Step	100 Mbps
Custom macro		Tool load monitoring function
Addition of custom macro	#100~#199, #500~#999	HWTM (Mounted)
Work coordinate Command	G15, G16	
Work coordinate Interpolation	G12.1, G13.1	
Helical interpolation	G07.1	
Circular interpolation	G02, G03	
Canned cycle	G73, G74, G76, G80 ~ G89	
Optional chamfering/corner R		
Skip function	G31	
Automatic coordinate system setting		
Coordinate system rotation	G68, G69	
Programmable mirror image	G50.1, G51.1	
Bidirectional pitch error compensation		
AI contour control(AICC) II	1,000 Block	
Conversational Program	Smart Guide-i	

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

WIA MACHINE TOOLS



home page



facebook



youtube



instagram



linkedin

Headquarter / R&D Center 106, Yongji-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Republic of Korea TEL : +82 55 225 9999

Overseas Sales Team 13, Iljik-ro 12beon-gil, Gwangmyeong-si, Gyeonggi-do, Republic of Korea TEL : +82 055 225 9645

OVERSEAS OFFICES

America corp. 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

Europe GmbH Alexander-Fleming-Ring 57, 65428 Russelsheim Germany TEL : +49-0-6142-9256-0

China Company No.16 Fenghuang Road, Fenghuang Town, Zhangjiagang City, Jiangsu Province, China TEL : +86-21-6427-9885

CIS Branch Office 050051, Kazakhstan, Almaty, Elebekova street 10, B.3 Office no. 103 TEL : +7-727-355-7133

India Branch Office #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348
