

Accessories

Item	Model	LG-500	LG-800	LG-1000	LG-1370	LG-1570
1.Full-Enclosed Splash Guard		●	●	●	●	●
2.Full-Enclosed Splash Guard for cts		★	★	★	★	★
3.Cooling System		●	●	●	●	●
4.Coolant Flushing Device		★	★	★	★	★
5.Coolant Jets Around Spindle		●	●	●	●	●
6.Spindle Oil Cooler		★	★	★	★	★
7.Air Blast Through Spindle		●	●	●	●	●
8.Table side air blast M50 control		●	●	●	●	●
9.Centralized automatic lubrication system		●	●	●	●	●
10.Oil Fluid Separator		●	●	●	●	●
11.X/Y/Z Axis Ball Screw Enforce Pressure		●	●	●	●	●
12.Coolant tank		●	●	●	●	●
13.Link type chip conveyer		★	★	★	★	★
14.Front Mounted Screw Type Chip Conveyer		★	★	★	★	★
15.Fluorescent Lampx1		●	●	●	●	●
16.Fluorescent Lampx2		★	★	★	★	★
17.Air Blast Through Spindle		●	●	●	●	●
18.Table Side Air Blast		●	●	●	●	●
19.Spindle Air Curtain		●	●	●	●	●
20.Cooling Tube Coolant gun		★	★	★	★	★
21.Hydraulic Hose Coolant gun		★	★	★	★	★
22.Air gun		★	★	★	★	★
23.Leveling Bolts and Blocks		●	●	●	●	●
24.Foundation bolt, Concrete		★	★	★	★	★
25.Remote Manual Pulse Generator		★	●	●	●	●
26.Convection Heat Exchanger in Control		★	★	★	●	●
27.Air conditioning for electrical cabinet	-	-	-	★	★	
28.Auto Power off		●	●	●	●	●
29.Operation Finish Lamp		●	●	●	●	●
30.RS-232 Interface		★	●	●	●	●
31.Operation Manual & Electric Drawing Equipment		●	●	●	●	●
32.Tool Package		●	●	●	●	●
33.#40 8000rpm Pulley spindle		●	●	●	●	●
34.#40 10000/12000rpmPulley spindle		★	★	★	★	★
35.#40 10000/12000/15000rpmDDS spindle		★	★	★	★	★
36.#40 Drum Type Tool Magazine	-	★	★	★	●	●
37.#40 Disk Type Tool Magazine	●	●	●	★	★	
38.Suspension Operator Box	-	-	-	●	●	
39.Coolant Through Spindle	★	★	★	★	★	★
40.20BAR Coolant Through Spindle	★	★	★	★	★	★
41.25Bar/40Bar/70Bar Coolant Through Spindle	★	★	★	★	★	★
42.NC Rotary Table	★	★	★	★	★	★
43.DNC Software	★	★	★	★	★	★
44.Auto Tool Length Measurement	★	★	★	★	★	★
45.Auto Tool Length and Diameter Measurement	★	★	★	★	★	★
46.Auto Work Piece Measurement	★	★	★	★	★	★
47.Closed Loop Linear Scale Positioning System	★	★	★	★	★	★
48.Mist coolant system	★	★	★	★	★	★
49.Oil Mist Collector System	★	★	★	★	★	★

She Hong INDUSTRIAL CO. LTD.

No.3 Jingke N. Road, Taichung City, 408 Taiwan

www.hartford.com.tw Tel: 886-4-23501980 Fax: 886-4-23581793

CAT.No.: 20230424 - E19

All Graphic and text on the catalog have been registered. Those who reprint will be held liable

Hartford
Hartrol • Smartcenter • Robocell
We manufacture intelligent machines only

Hartford
EXCLUSIVE
HartrolPlus APP

Intelligent Machining Center

LG Series
Smartcenter

- Hartrol premium controller
- 5-Year warranty on guideways
- One-piece bed design
- Tool change time: 1.38 sec
- Oversized column design



Hartrol Premium®
From tradition to intelligent



Automation/ Intelligent
Application program
Intelligentization
Key technology
Specification parameter

A.I. Applications inside, Hartrol Premium is the control which provides machining status with advanced features.

Imagine what future machines ought to be outlined.

AiSmartControl



Major functions of Hartford AI controller



Hartford
redefine the future



AI
+ Remote Warm-up & Turn-on
+ Hartrol Plus Sync & Update
+ User Connect



Thermal stability solution
+ Spindle Thermal Compensation
+ Casting Thermal Compensation
+ Thermal Symmetry / Thermal Balancing



ZDT
+ Diagnosis Report on Spindle Operation
+ Alarm Report System



IoT
+ Facial Recognition System
+ AI Efficient Lubrication Management
+ Smart Efficient Chip Collection



How to quickly implement automation?

Hartford Robot Production Cell

Easy to get started

Hartford Robocell provides you a professional robot training and rich automation experience, to let you quickly learn and easily operate your automation systems

Quality control monitoring

Automation systems have to pass all the strict Quality Control tests at every stage like design, assembly, testing, final inspection and shipment, complete quality control processes for all the products.

Professional analysis

Robocell Machining optimization service, to let you be on the top by using professional machining methods

What definition of Automation interface only :



1. Automatic Door

- Pneumatic/Automatic Door System_Operating Door
- Pneumatic/Servo Automatic Door System_Right Side Door

2. Automatic Interface

- I/O Preparation
- Profibus Link Preparation
- CC-Link Preparation
- EtherNet/IP Link Preparation

3. Pneumatic/Hydraulic Interface

- 1/2/3 Cell Automatic Pneumatic/Hydraulic Interface in the machine

4. Other options

- High Pressure Spray Nozzle with Automatic Preparation

- HStainless Base

- High-volume chip-removal system comprising dual side augers

A most durable and stable machining center.

A perfect demonstration for machining accuracy and ability.

A valuable vertical machining center is the result of constant creative concepts and total dedication to quality. When the ambition of pursuing perfection is incorporated into the design, the result is a perfect machine. The Hartford F1 vertical machining centers are designed and built with these concepts in mind. Over the years, Hartford engineers have spent great effort designing a unique VMC that is cost-effective for our customers.



1.Bicycle



2.Auto industry-connecting rod

Actual cutting tests

Model : LG -800

■ Spindle : 8,000 rpm Pulley type 11kW ■ Cutting material : S45C



Face milling

- | | |
|----------------|--------------|
| Tool diameter | Ø80 mm |
| Feed rate | 1,800 mm/min |
| Cutting depth | 2 mm |
| Cutting width | 60 mm |
| Cutting volume | 216 cc/min |



End milling

- | | |
|----------------|--------------|
| Tool diameter | Ø50 mm |
| Feed rate | 2,600 mm/min |
| Cutting depth | 30 mm |
| Cutting width | 2 mm |
| Cutting volume | 156 cc/min |



Tapping

- | | |
|---------------|---------------|
| Tool diameter | M20 x P2.5 mm |
| Feed rate | 508 mm/min |
| Cutting depth | 25 mm |
| Spindle speed | 254 rpm |



Drilling

- | | |
|---------------|-----------|
| Tool diameter | Ø18 mm |
| Feed rate | 77 mm/min |
| Cutting depth | 30 mm |
| Spindle speed | 1769 rpm |

Model : LG-1570

■ Spindle : 12,000 rpm Pulley type 11kW ■ Cutting material : S45C



Face milling

- | | |
|----------------|--------------|
| Tool diameter | Ø80 mm |
| Feed rate | 1,000 mm/min |
| Cutting depth | 3 mm |
| Cutting width | 65 mm |
| Cutting volume | 195 cc/min |



End milling

- | | |
|----------------|-------------|
| Tool diameter | Ø63 mm |
| Feed rate | 3500 mm/min |
| Cutting depth | 30 mm |
| Cutting width | 2 mm |
| Cutting volume | 180 cc/min |



Tapping

- | | |
|---------------|---------------|
| Tool diameter | M20 x P2.5 mm |
| Feed rate | 375 mm/min |
| Cutting depth | 20 mm |
| Spindle speed | 150 rpm |



Drilling

- | | |
|---------------|------------|
| Tool diameter | Ø17.5 mm |
| Feed rate | 800 mm/min |
| Cutting depth | 30 mm |
| Spindle speed | 1600 rpm |

All the results featured in this catalogue were produced under strict testing condition in a special zed testing environment. Under different testing conditions and in less than ideal testing environments. That the test results may vary from those shown in this catalogue.

The very first step for fully intelligent machining.

What is Hartrol Premium?

Hartrol premium is a brand new intelligent controller Hartrol , Hartnet and Hartford electrical function together which developed and made by Hartford.

HMI and operation is user friendly, it can achieve :

1. Internet connection, collect and analyze data, monitoring by portable device
2. Intelligent control: Auto revise human error and operating basis
3. Real time update new APPs

The difference between Hartrol plus and others

Function	Hartrol Premium	Others
Screen Size	19"Multi-touch Panel	10.4" (OPT:15")
Look Ahead Block	2700(G5P20000)	400(1000 Max.)
Hard Drive	32GB SSD	NO
Smoothing Interpolation	SSS 4G	Option
Industry 4.0	Hartford UserConnect	NO



Hartford APP Store

The main technologies of Hartford smartcenter include intelligent managing system, status monitoring, alarm predicting, machine status diagnosis, crash preventing, 3D program simulation, machining efficiency improving...etc. All the intelligent functions help you control the machine status and assure the job quality.




EXCLUSIV
e
Hartrol Plus APP

The Intelligent Controller You Should Have

With three major solutions, Hartrol Plus takes you machining to the next level.

Highly optimized and intelligent controls bring even more capabilities and productivity to your metal cutting processes.

With ease use, advanced automation, and smart data collection, Hartrol plus is essential tool for enhancing performance on your production floor.

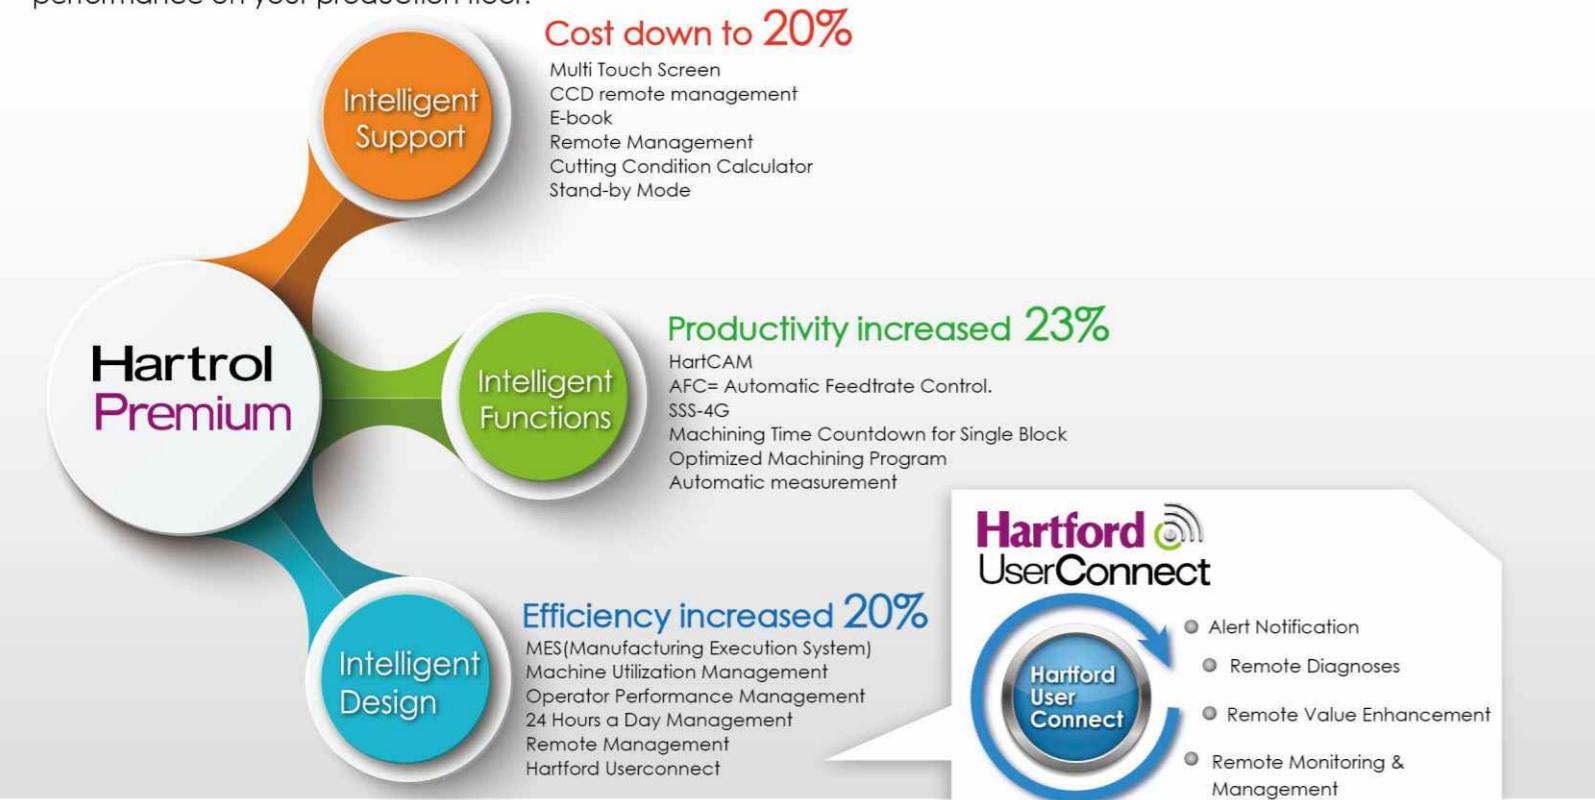

Hartford smartcenter APP



The fuctions mentioned above will need to option the Hartrol Premium controller or Dual screen with Fanuc controller.

What Hartford APP can do for you?

The integrated intelligent functions of Hartrol plus could achieve your machining requirements.


For more Hartrol Plus functions, please contact our sales person.

AI Environment Thermal Displacement Compensation(opt.)

Vertical machining center : **0.03mm**

Thermal displacement problem is improved up to **60%**

It can achieve good accuracy as in constant temperature room.

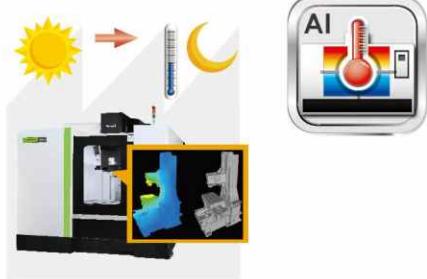

AI Facial recognition system(opt.)

Face ID log-in authority

Recognition time: **2 seconds**

Recognition accuracy: **100%**



Highlight on Intelligent Auger(opt.)

50% efficacy increases

- Intelligent auger automatically proceeds cleaning iron chips based on electrical current of spindle.
- Intelligent auger automatically performing reversal mode in case amount of iron chips outnumbers, preventing from machine stop. Auger is overly shielded



Graphical user interfaces for part setting, inspection, tool setting

- Ease of use
- Increasing usability
- Eliminating manual set-up tasks
- Increasing efficiency



AI Efficient Lubrication Management(opt.)

50% lubrication saved.

- Auto-adjustment oil supply base on machining condition.
- 50% oil consumption saved



On line update

With online updating system similar to smart phone will make sure your operating system stays the latest version with Hartford.

- 24hr → Live updating , no boundary no time zone difference.
- NEW → Synchronize with Hartford for the latest information and functions.
- Easy → One key updating, easy and fast !




AFC(opt.)

Machining efficiency is increased by **21%** ↑

Controls the feed rate depending on the machining situation

- Adjusting feed rate automatically
- Lengthen your tool life
- Reduce machining time

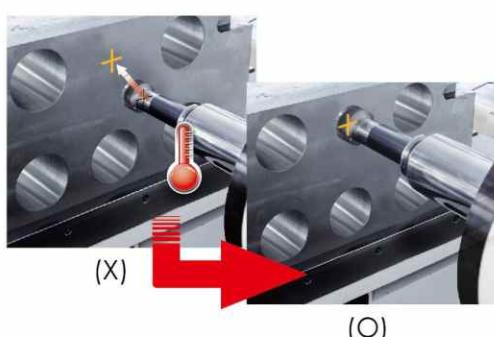

Thermal compensation on spindle(opt.)

No worries about HEAT!!

- Machine with compensation
#40 spindle thermal extension is within 0.03mm
#50 spindle thermal extension is within 0.02mm

- Machine without compensation
Spindle thermal extension is around 0.10mm
Notes: Above test is under room temperature



Hartford F1-the Ultimate VMC (LG-500/800/1000)

One of the important elements that determines a machining center's accuracy and capability is structural rigidity.

LG series was designed according to the principles of FEA




Full range of linear guideway five-year warranty:

Warranty coverage will not apply under following conditions

- 1.Improper operation (collision)
- 2.Lack of regular cleaning of accumulated debris causing damage to the linear rails & carriages.



- One-piece bed design**
- The bed is one-piece design.
 - The column is wider.
 - Prevents twisting and distortion under even the most severe cutting forces.
 - The fine grain Meehanite cast iron contributes to unparalleled damping characteristics.

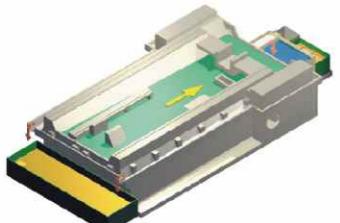

- Excellent tool change time**
- LG-500 minimum tool change time **1.18 sec** (tool-to-tool)
 - LG-800/1000 minimum tool change time **1.38 sec** (tool-to-tool).



- Oversized column design**
- Increased width of the interface between the column and base.
 - Enhances machine stability.
 - Increases machine rigidity and efficiency.



- High accuracy linear guideway design**
- The line guideways on all 3-axes are high grade, providing stability for heavy cutting.
 - High efficiency machining center.
 - Maximum rapid traverse rate of **30,000 mm/min.**




The Brand of Highest Efficiency for Electrical Industries (LG-1370/1570)

Offering more unique features than any other competitive machine, providing superior value in speed, accuracy and stability.



The picture shows LG-1370

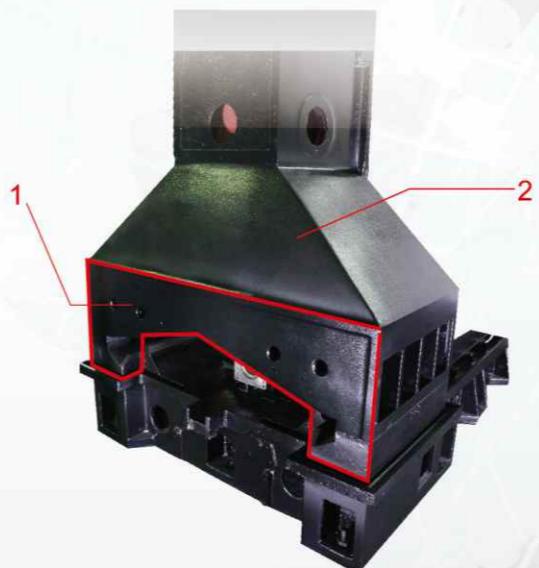

- 1 Extra large interference between column and base**

- Increases column rigidity in X-axis direction.
- The extension of the column base increases rigidity in Y and Z axes.

- 2 Column rear-inclination design**

- Reduces unnecessary mass.
- Shifts the center of gravity forwards.
- Increases the damping effect in the Y-axis direction.



- 3-axis direct transmission between servo motor and ballscrew**

- High torque servo motors are directly coupled with ballscrews.
- Without backlash or servo lag problem caused by a belt.
- All ballscrews are center-supported plus both ends utilize precision angular contact bearings.
- Boosts machining efficiency and reliability.

Spindles Manufactured by Hartford Offer Quality Assurance

Machine Dimensions

Spindle type

- #40 Pulley 12000 rpm(8000/10000 rpm)
- #40 DDS 15000 rpm (10000/12000 rpm)


BBT for optional

- Dual contact between the taper and the flange.
- Improves the rigidity, accuracy, speed and performance.
- Radial deflection, vibration and deviation are significantly reduced.


Spindle torque diagrams

LG-500/800/1000


Mitsubishi

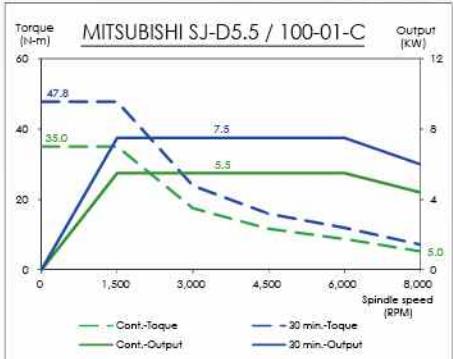


Fanuc

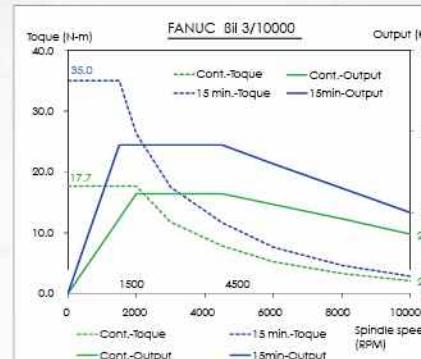

Fanuc



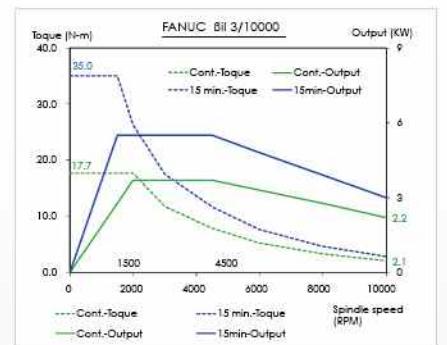


LG-1370/1570 Fanuc

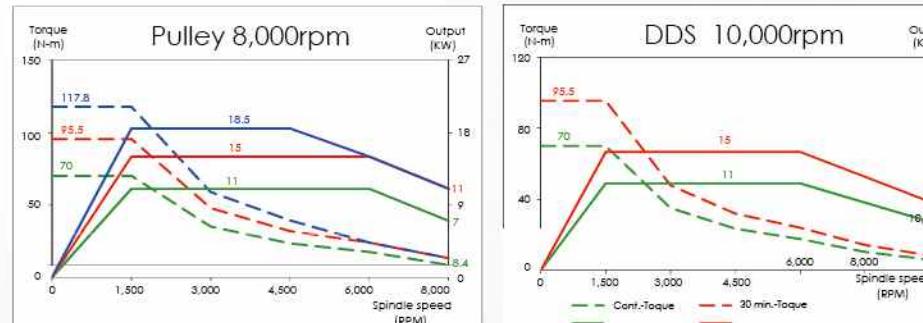


LG-1370/1570

Mitsubishi

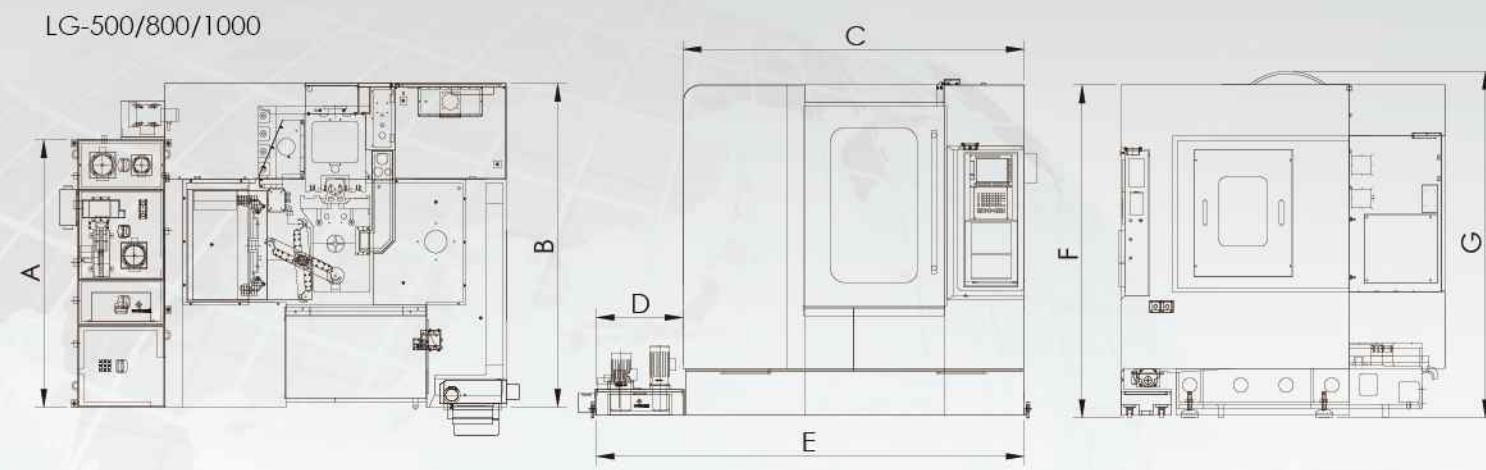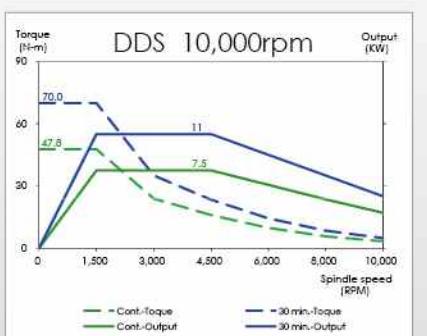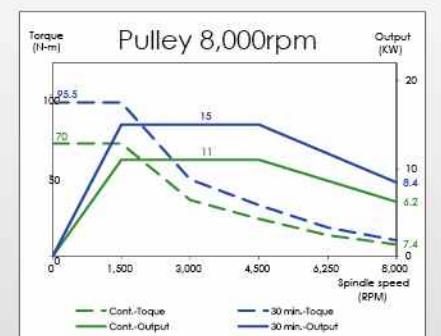

	A	B	C	D	E	F	G
LG-500	1885	2100	1850	300	2150	2140	-
LG-800	1850	2240	2360	600	2960	2300	2394
LG-1000	1850	2240	2900	600	3500	2300	2394

LG-1370/1570

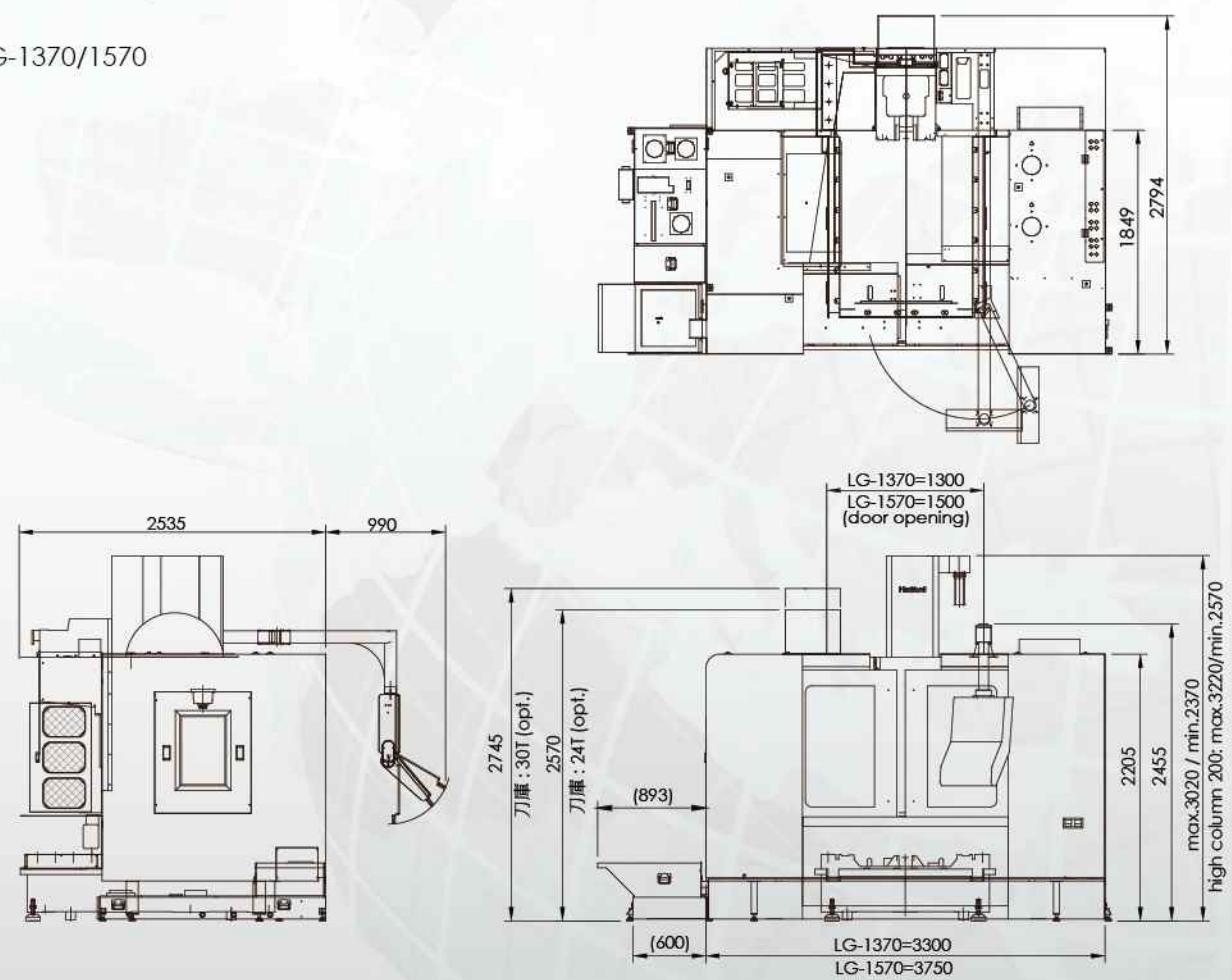

Machine Specifications

	Model	unit	LG-500	LG-800	LG-1000	LG-1370	LG-1570
Table	Working surface	mm	620 x 420	950 x 510	1150 x 510	1400 x 650	1600 x 650
	T-slot Width x pitch(number)	mm	18 x 130(3)	18 x 160(3)	18 x 160(3)	18 x 125(5)	18 x 125(5)
	Max. load (Average)	kg	300	500	700	1000	1000
Travel	X -axis travel	mm	520	800	1000	1300	1500
	Y -axis travel	mm	420	510	510	700	700
	Z -axis travel	mm	450	630	630	650	650
Spindle	Distance from spindle to table	mm	100~550	100~730 opt.300~930	100~730 opt.300~930	150~800 opt.350~1000	150~800 opt.350~1000
	Distance from spindle center to column	mm	460	562.5	562.5	720	720
	Spindle nose taper	rpm	#40	#40	#40	#40	#40
Feed	Spindle speed(Pulley)	rpm	8000/10000/12000	8000/10000/12000	8000/10000/12000	8000/10000/12000	8000/10000/12000
	Spindle speed(DDS)	rpm	10000/12000/15000	10000/12000/15000	10000/12000/15000	10000/12000/15000	10000/12000/15000
	Cutting feedrate (X / Y / Z)	m/min	10/10/10	12/12/12	12/12/12	15/15/15	15/15/15
ATC	Rapid traverse rate (X / Y / Z)	m/min	40/40/40	30/30/24 opt. 40/40/32	30/30/24 opt. 40/40/32	30/30/24 opt. 40/40/30	30/30/24 opt. 40/40/30
	Capacity	pcs	A:24	A:24(30)	A:24(30)	A:24(30/40)	A:24(30/40)
	Max. tool weight	kg	7	7	7	7	7
Motor	Max. tool size(dia.x length)	mm	A: Ø 80x200L	A: Ø 75x300L	A: Ø 75x300L	A: Ø 75x300L	A: Ø 75x300L
	Tool shank		BT40(BBT/CAT/DIN)	BT40(BBT/CAT/DIN)	BT40(BBT/CAT/DIN)	BT40(BBT/CAT/DIN)	BT40(BBT/CAT/DIN)
	Pull stub bolt		P40T-1(CAT-40/DIN 69872)				
Positioning Accuracy	Spindle drive motor (cont./30 min)	kw	5.5/7.5	5.5/7.5 opt. 7.5/11	5.5/7.5 opt. 7.5/11	11/15 opt. 15/18.5	11/15 opt. 15/18.5
	Positioning accuracy (JIS B6330), without linear scale	mm	±0.008	±0.008	±0.008	±0.008	±0.008
	Repeatability (JIS B6330), without linear scale	mm	±0.002	±0.002	±0.002	±0.003	±0.003
Other	Positioning accuracy (JIS B6330), with linear scale	mm	±0.006	±0.006	±0.006	±0.006	±0.006
	Repeatability (JIS B6330), with linear scale	mm	±0.002	±0.002	±0.002	±0.002	±0.002
	Positioning accuracy (VDI 3441)	mm	0.010	0.010	0.010	0.014	0.015
Other	Repeatability(VDI 3441)	mm	0.006	0.006	0.006	0.008	0.010
	Required air pressure	kg/cm ²	6.5	6.5	6.5	6.5	6.5
	Electric power requirement	KVA	10~25	10~30	10~30	20~40	20~40
Other	Machine weight	kg	3330	4300	4530	8300	9000
	Coolant tank(standard)	L	237	260	285	275	285
	Machine dimension(LxWxH)	mm	2100 x 1850 x 2370	2360 x 2240 x 2790	2900 x 2240 x 2790	3300 x 2535 x 3020	3750 x 2535 x 3020
Other	Floor space (standard tank)	mm	2100 x 2250	2960 x 2510	3500 x 2510	3900 x 3660	4350 x 3660

VDI 3441 accuracy available upon order request.

Specifications & dimensions are subject to change without notice (for actual weight, shipped product shall prevail.)

Standard & Optional Electrical Function

Hartrol / Standard

- Workpiece calibration by MPG directly
- Parameter package
- Thread cutting(0i& 31i only)
- Tool magazine display(0i& 31i only)
- Tool status display((0i& 31i only)
- Special engraving macro

Hartnet / Optional

- Management system of utilization
- Machining time countdown
- Convenient file transfer

Electrical Function /Optional

- Lifting function against gravity
- Retraction for rigid tapping
- Intelligent MPG